

LECTURE NOTES

ON

SURVEYING

SYLLABUS

UNIT-1

INTRODUCTION

LECTURE 1

General:

Surveying is defined as “taking a general view of, by observation and measurement determining the boundaries, size, position, quantity, condition, value etc. of land, estates, building, farms mines etc. and finally presenting the survey data in a suitable form”. This covers the work of the valuation surveyor, the quantity surveyor, the building surveyor, the mining surveyor and so forth, as well as the land surveyor.

Another school of thought define surveying “as the act of making measurement of the relative position of natural and manmade features on earth’s surface and the presentation of this information either graphically or numerically.

The process of surveying is therefore in three stages namely:

This part of the definition is important as it indicates the need to obtain an overall picture of what is required before any type of survey work is undertaken. In land surveying, this is achieved during the reconnaissance study.

Observation and Measurement

This part of the definition denotes the next stage of any survey, which in land surveying constitutes the measurement to determine the relative position and sizes of natural and artificial features on the land.

Presentation of Data:

The data collected in any survey must be presented in a form which allows the information to be clearly interpreted and understood by others. This presentation may take the form of written report, bills of quantities, datasheets, drawings and in land surveying maps and plan showing the features on the land.

Types of Surveying

On the basis of whether the curvature of the earth is taken into account or not, surveying can be divided into two main categories:

Plane surveying:

The type of surveying where the mean surface of the earth is considered as a plane. All angles are considered to be plane angles. For small areas less than 250 km² plane surveying can safely be used. For most engineering projects such as canal, railway, highway, building, pipeline, etc constructions, this type of surveying is used. It is worth noting that the difference between an arc distance of 18.5 km and the subtended chord lying in the earth’s surface is 7mm. Also the sum of the angles of a plane triangle and the sum of the angles in a spherical triangle differ by 1second for a triangle on the earth’s surface having an area of 196km²

Geodetic surveying:

It is that branch of surveying, which takes into account the true shape of the earth (spheroid).

Introduction

For easy understanding of surveying and the various components of the subject, we need a deep understanding of the various ways of classifying it.

Objective

To enable the students have understanding of the various ways of classifying surveying

Classification Of Surveying

Surveying is classified based on various criteria including the instruments used, purpose, the area surveyed and the method used.

Classification on the Basis of Instruments Used.

Based on the instrument used; surveys can be classified into;

- i) Chain tape surveys
- ii) Compass surveys
- iii) Plane table surveys
- iv) Theodolite surveys

Classification based on the surface and the area surveyed**i) Land survey**

Land surveys are done for objects on the surface of the earth. It can be subdivided into:

(a) Topographic survey:

This is for depicting the (hills, valleys, mountains, rivers, etc) and manmade features (roads, houses, settlements...) on the surface of the earth.

(b) Cadastral survey

It is used to determining property boundaries including those of fields, houses, plots of land, etc.

(c) Engineering survey

It is used to acquire the required data for the planning, design and Execution of engineering projects like roads, bridges, canals, dams, railways, buildings, etc.

City surveys:

The surveys involving the construction and development of towns including roads, drainage, water supply, sewage street network, etc, are generally referred to as city survey.

Marine or Hydrographic Survey:

Those are surveys of large water bodies for navigation, tidal monitoring, the construction of harbors etc.

Astronomical Survey:

Astronomical survey uses the observations of the heavenly bodies (sun, moon, stars etc) to fix the absolute locations of places on the surface of the earth

LECTURE 2

CLASSIFICATION ON THE BASIS OF PURPOSE

i) Engineering survey

ii) Control Survey:

Control survey uses geodetic methods to establish widely spaced vertical and horizontal control points.

iii) Geological Survey

Geological survey is used to determine the structure and arrangement of rock strata. Generally, it enables to know the composition of the earth.

iv) Military or Defense Survey

It is carried out to map places of military and strategic importance

iv) Archeological survey is carried out to discover and map ancient/relies of antiquity.

Classification Based On Instrument Used

i. Chain/Tape Survey:

This is the simple method of taking the linear measurement using a chain or tape with no angular measurements made.

ii. Compass Survey:

Here horizontal angular measurements are made using magnetic compass with

the linear measurements made using the chain or tape.

iii. Plane table survey:

This is a quick survey carried out in the field with the measurements and drawings made at the same time using a plane table.

iv. Leveling

This is the measurement and mapping of the relative heights of points on the earth's surface showing them in maps, plane and charts as vertical sections or with conventional

symbols.

Vi. Theodolite Survey:

Theodolite survey takes vertical and horizontal angles in order to establish controls

CLASSIFICATION BASED ON THE METHOD USED

1. Triangulation Survey

In order to make the survey, manageable, the area to be surveyed is first covered with series of triangles. Lines are first run round the perimeter of the plot, then the details fixed in relation to the established lines. This process is called triangulation. The triangle is preferred as it is the only shape that can completely cover an irregularly shaped area with minimum space left.

ii. Traverse survey:

If the bearing and distance of a place of a known point is known: it is possible to establish the position of that point on the ground. From this point, the bearing and distances of other surrounding points may be established. In the process, positions of points linked with lines linking them emerge. The traversing is the process of establishing these lines, is called traversing, while the connecting lines joining two points on the ground. Joining two while bearing and distance is known as traverse A traverse station is each of the points of the traverse, while the traverse leg is the straight line between consecutive stations. Traverses may either be open or closed.

1. Closed Traverse:

When a series of connected lines forms a closed circuit, i.e. when the finishing point coincides with the starting point of a survey, it is called as a „closed traverse“, here ABCDEA represents a closed traverse. (Fig 2.1 (a))


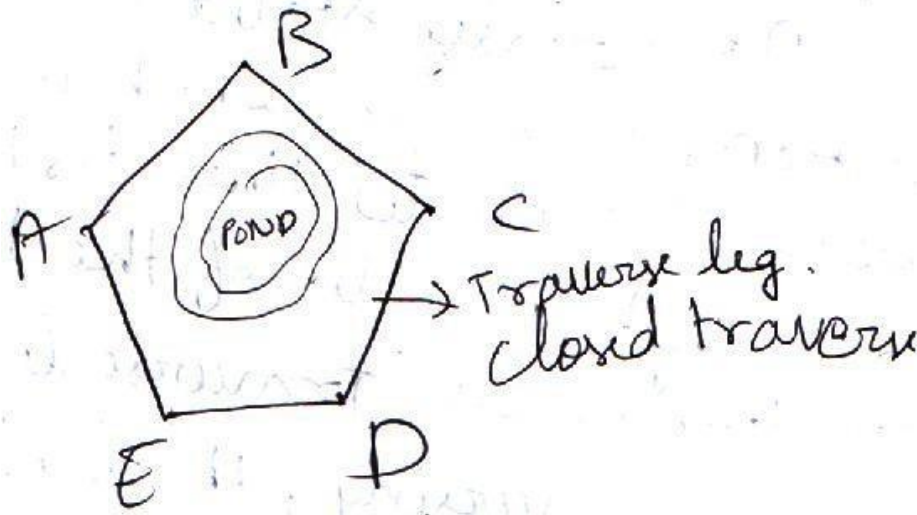


Fig 2.1 (a) Closed traverse is suitable for the survey of boundaries of ponds, forests etc.

2. Open Traverse:

When a sequence of connected lines extends along a general direction and does not return to the starting point, it is known as „open traverse“ or (unclosed traverse). Here ABCDE represents an open traverse.

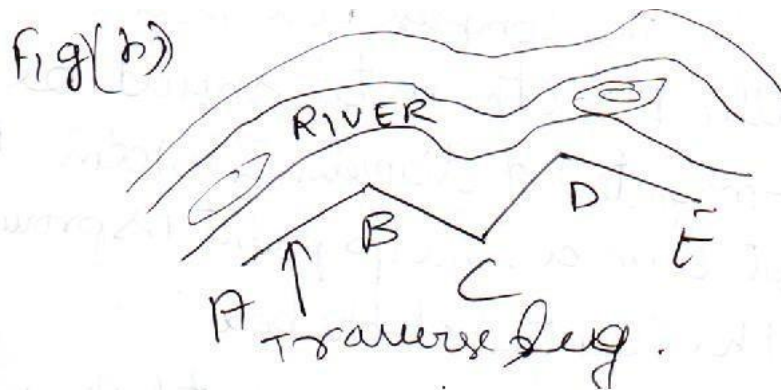

LECTURE 3

CLASSIFICATION OF SURVEYORS

Surveying is made up of various specializations known as sectors or classes as shown below:

1. General Practice Surveyors:

- Surveyors under this class are mostly concerned with valuation and investment. Valuation surveyors deal with property markets, land and property values, valuation procedures and property law. Investment surveyors help investors to get the best possible return from property.
- They handle a selection of properties for purchase or sale by pension funds,

insurance companies, charities and other major investors. They also specialize in housing policy advice, housing development and management.

2. Planning and Development Surveyors

- They are concerned with preparing planning applications and negotiating with local authorities planners to obtain planning permission.

3. Building Surveyors

- Their work involves advising on the construction, maintenance, repair of all types of residential and commercial property.
- The analysis of building defects is an important part of a building surveyor's discipline.

4. The Quantity Surveyors

- They evaluate project cost and advice on alternative proposals. They also ensure that each element of a project agrees with the cost plan allowance and that the overall project remains within budget.

5. Rural Practice Surveyors:

- Surveyors in rural practice advise land owners, farmers and others with interests in the countryside.
- They are responsible for the management of country estates and farms, the planning and execution of development schemes for agriculture, forestation, recreation, sales of properties and livestock.

6. Mineral Surveyors

- They plan the development and future of mineral workings. They work with local authorities and the land owners on planning applications and appeals, mining



laws and working rights, mining subsidence and damage, the environmental effects of land and deep underground mines.

7. Land surveyors:



- They measure land and its physical features accurately and record them in the form of a map or plan for the purpose of planning new building and by local authorities in managing roads, housing estates, and other facilities.
- They also undertake the positioning and monitoring for construction works.

LECTURE 4 BRANCHES OF SURVEYING

1. Aerial Surveying

Aerial surveys are undertaken by using photographs taken with special cameras mounted in an aircraft viewed in pairs. The photographs produce three-dimensional images of ground features from which maps or numerical data can be produced usually with the aid of stereo plotting machines and computers.



2. Hydrographic Surveying (Hydro-Survey)

Hydro survey is undertaken to gather information in the marine environment such as mapping out the coast lines and sea bed in order to produce navigational charts.



- It is also used for off shore oil exploration and production, design, construction and maintenance of harbors, inland water routes, river and sea defense, and pollution control and ocean studies.




3. Geodetic Survey:

- In geodetic survey, large areas of the earth surface are involved usually on national basis where survey stations are precisely located large distances apart. Account is taken of the curvature of the earth, hence it involves advanced

Mathematical theory and precise measurements are required to be made.

- Geodetic survey stations can be used to map out entire continent, measure the size and shape of the earth or in carrying out scientific studies such as determination of the Earth's magnetic field and direction of continental drifts.

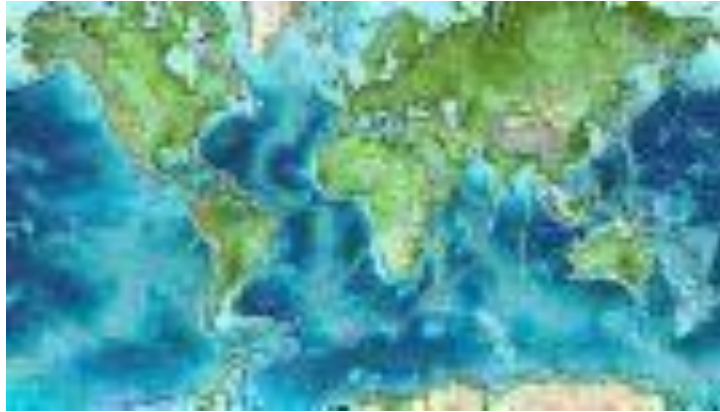

4. Plane Surveying

- In plane surveying relatively small areas are involved and the area under consideration is taken to be a horizontal plane. It is divided into three branches.
 - Cadastral surveying
 - Topographical surveying
 - Engineering surveying

5. Cadastral surveying

- These are surveys undertaken to define and record the boundary of properties, legislative area and even countries.
- It may be almost entirely topographical where features define boundaries with the topographical details appearing on ordinance survey maps.
- In the other hand, markers define boundaries corner or line points and little account may be taken of the topographical features.

6. Topographical Survey

- These are surveys where the physical features on the earth are measured and maps/plans prepared to show their relative positions both horizontally and vertically.



- The relative positions and shape of natural and man –made features over an area are established usually for the purpose of producing a map of the area or for establishing geographical information system.

8. Engineering Survey

- These are surveys undertaken to provide special information for construction of Civil Engineering and building projects.



.LECTURE 5

Reconnaissance:

- This is an exhaustive preliminary survey of the land to be surveyed. It may be either ground reconnaissance or aerial reconnaissance survey.
- Reconnaissance is made on arrival to site during which an overall picture or view of the area is obtained. The most suitable position of stations is selected, the purpose of the survey and the accuracy required will be drawn, and finally the method of observation will be established.

Objectives of reconnaissance

1. To ascertain the possibility of building or constructing route or track through the area.
2. To choose the best one or more routes and record on map
3. To estimate probable cost and draft airport.

The basic principles and process surveying

Introduction

So far, we have discussed the meaning, object and major classifications of surveying. Now let us move further to discuss the basic principles and process of surveying.

Objectives.

- To enable students understand the basic principles of surveying.
- To expose the students to the process of surveying.

LECTURE 6

BASIC PRINCIPLES IN SURVEYING

PRINCIPLE OF WORKING FROM WHOLE TO PART

- It is a fundamental rule to always work from the whole to the part. This implies a precise control surveying as the first consideration followed by subsidiary detail surveying.
- This surveying principle involves laying down an overall system of stations whose positions are fixed to a fairly high degree of accuracy as control, and then the survey of details between the control points may be added on the frame by less elaborate methods.
- Once the overall size has been determined, the smaller areas can be surveyed in the knowledge that they must (and will if care is taken) put into the confines of the main overall frame.
- Errors which may inevitably arise are then contained within the framework of the control points and can be adjusted to it.

Surveying is based on simple fundamental principles which should be taken into consideration to enable one get good results.

(a) Working from the whole to the part

It is achieved by covering the area to be surveyed with a number of spaced out control point called primary control points whose pointing have been determined with a high level of precision using sophisticated equipments. Based on these points as theoretic, a number of large triangles are drawn. Secondary control points are then established to fill the gaps with lesser precision than the primary control points. At a more detailed and less precise level, tertiary control points at closer intervals are finally established to fill in the smaller gaps. The main purpose of surveying from the whole to the part is to localize the errors as working the other way round would magnify the errors and introduce distortions in the survey. In partial terms, this principle involves covering the area to be surveyed with large triangles. These are further divided into smaller triangles and the process continues until the area has been sufficiently covered with small triangles to a level that allows detailed surveys to be made in a local level. Error is in the whole operation as the vertices of the large triangles are fixed using higher precision instruments.

(b) Using measurements from two control parts to fix other points.

Given two points whose length and bearings have been accurately determined, a line can be drawn to join them hence surveying has control reference points. The locations of various other points and the lines joining them can be fixed by measurements made from these two points and the lines joining them. For an example, if A and B are the control points, the following operations can be performed to fix other points.

i) Using points A and B as the centers ascribe arcs and fix (where they intersect).

- ii) Draw a perpendicular from D along AB to a point C.
- iii) To locate C, measure distance AB and use your protractor to equally measure angle ABC.
- iv) To locate C the interior angles of triangle ABC can be measured. The lengths of the sides AC and BC can be calculated by solving the triangle.

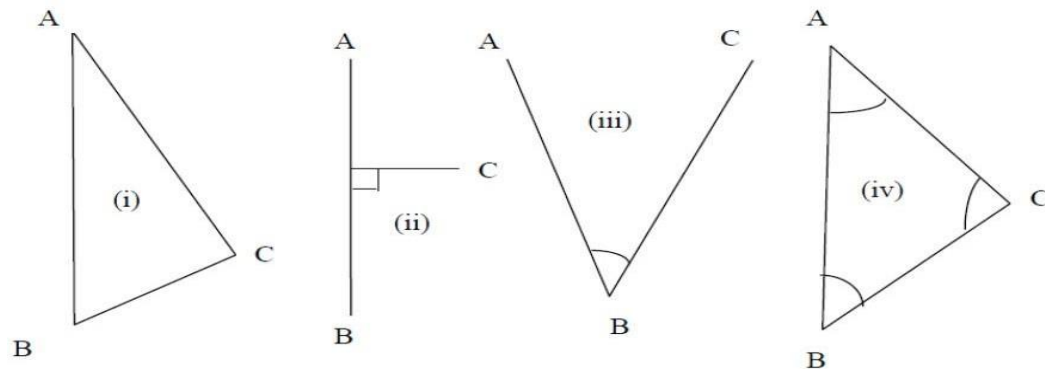


Fig. 6.1: Fixing the third points using two points

The process of surveying:

The survey process passes through 3 main phases – the reconnaissance, field work and measurements, and, the office work.

(a) Reconnaissance survey

This is a pre-field work and measurement phase. It requires taking an overall inspection of the area to be surveyed to obtain a general picture before commencement of any serious survey. Walking through the site enables one to understand the terrain and helps in determining the survey method to be adopted, and the scale to be used. The initial information obtained in this stage helps in the successful planning and execution of the survey.

(b) Field work and measurement:

This is the actual measurements in the field and the recordings in the field notebook. To get the best results in the field, the surveyor must be acquainted with the functions of the equipments and take good care of them.

(c) Office work: This is the post field work stage in which data collected and recordings in the field notebooks are decoded and used to prepare the charts, planes and maps for presentation to the clients and the target audience.

LECTURE 7

IMPORTANCE OF SCIENTIFIC HONESTY

- Honesty is essential in booking notes in the field and when plotting and computations in the office. There is nothing to be gained from cooking the survey or altering dimensions so that points will tie-in on the drawing. It is utterly unprofessional to betray such trust at each stage of the survey.
- This applies to the assistants equally as it does to the surveyor in charge. Assistants must also listen carefully to all instructions and carry them out to the later without questions.

CHECK ON MEASUREMENTS

- The second principle is that; all survey work must be checked in such a way that an error will be apparent before the survey is completed.
- Concentration and care are necessary in order to ensure that all necessary measures are taken to the required standard of accuracy and that nothing is omitted. Hence they must be maintained in the field at all times.
- Surveyor on site should be checking the correctness of his own work and that of others which is based on his information.
- Check should be constantly arranged on all measurements wherever possible. Check measurements should be conducted to supplement errors on field. Pegs can be moved, sight rails etc
- Survey records and computations such as field notes, level books, field books, setting out record books etc must be kept clean and complete with clear notes and diagrams so that the survey data can be clearly understood by others. Untidy and anonymous figures in the field books should be avoided.
- Like field work, computations should be carefully planned and carried out in a systemic manner and all field data should be properly prepared before calculations start. Where possible, standardized tables and forms should be used to simplify calculations. If the result of a computation has not been checked, it is considered unreliable and for this reason, frequent checks should be applied to every calculation procedure.
- As a check, the distances between stations are measured as they are plotted, to see that there is correspondence with the measured horizontal distance. Failure to match indicates an error in plotting or during the survey.
- If checks are not done on observations, expensive mistake may occur. It is always preferable to take a few more dimensions on site to ensure that the survey will resolve itself at the plotting stage.

ACCURACY AND PRECISION

These terms are used frequently in engineering surveying both by manufacturers when quoting specifications for their equipments and on site by surveyors to describe results obtained from field work.

- Accuracy allows a certain amount of tolerance (either plus or minus) in a measurement, while;
- Precision demands exact measurement. Since there is no such things as an absolutely exact measurement, a set of observations that are closely grouped together having small deviations from the sample mean will have a small standard error and are said to be precise.

ECONOMY OF ACCURACY AND ITS INFLUENCE ON CHOICE OF EQUIPMENTS

- Survey work is usually described as being to a certain standard of accuracy which in turn is suited to the work in hand. Bearing in mind the purpose for which the survey is being made, it is better to achieve a high degree of accuracy than to aim for precision (exactness) which if it were to be altered would depend not only on the instrument used but also on the care taken by the operator to ensure that his work was free from mistake.
- Always remember that, the greater the effort and time needed both in the field and in the office, the more expensive survey will be for the client. The standard accuracy attained in the field must be in keeping with the size of the ultimate drawings.
- The equipment selected should be appropriate to the test in hand. An important factor when selecting equipment is that the various instruments should produce roughly the same order of precision. A steel chain best at an accuracy of 1/500 to 1/1000 would be of little use for work requiring an accuracy of 1/1000. Similarly, the Theodolite reading to one second would be pointless where a reading to one minute insufficient.
- Having selected the equipment necessary, the work should be thoroughly checked and if found wanting should be adjusted, repaired or replaced or have allowance calculated for its deficiencies. This task will be less tedious if field equipment is regularly maintained.

Horizontal Distance Measurement

One of the basic measurements in surveying is the determination of the distance between two points on the earth's surface for use in fixing position, set out and in scaling. Usually spatial distance is measured. In plane surveying, the distances measured are reduced to their equivalent horizontal distance either by the

procedures used to make the measurement or by applying numerical corrections for the slope distance (spatial distance). The method to be employed in measuring distance depends on the required accuracy of the measurement, and this in turn depends on purpose for which the measurement is intended.

Pacing: –

Where approximate results are satisfactory, distance can be obtained by pacing (the number of paces can be counted by tally or pedometer registry attached to one leg) Average pace length has to be known by pacing a known distance several times and taking the average. It is used in reconnaissance surveys & in small scale mapping

Odometer of a vehicle: -

Based on diameter of tires (no of revolutions \times wheel diameter); this method gives a fairly reliable result provided a check is done periodically on a known length. During each measurement a constant tyre pressure has to be maintained.

Tachometry:

Distance can be measured indirectly by optical surveying instruments like Theodolite. The method is quite rapid and sufficiently accurate for many types of surveying operations.

Taping (chaining): - this method involves direct measurement of distances with a tape or chain. Steel tapes are most commonly used. It is available in lengths varying from 15m to 100m. Formerly on surveys of ordinary precision, lengths of lines were measured with chains.

Electronic Distance Measurement (EDM): - are indirect distance measuring instruments that work using the invariant velocity of light or electromagnetic waves in vacuum. They have high degree of accuracy and are effectively used for long distances for modern surveying operations.

LECTURE 8

CHAIN SURVEYING

This is the simplest and oldest form of land surveying of an area using linear measurements only. It can be defined as the process of taking direct measurement, although not necessarily with a chain.

EQUIPMENTS USED IN CHAIN SURVEYING

These equipments can be divided into three, namely

- (i) Those used for linear measurement. (Chain, steel band, linear tape)
- (ii) Those used for slope angle measurement and for measuring right angle (Eg. Abney level, clinometers, cross staff, optical squares)
- (iii) Other items (Ranging rods or poles, arrows, pegs etc).

1. Chain:-

The chain is usually made of steel wire, and consists of long links joined by shorter links. It is designed for hard usage, and is sufficiently accurate for measuring the chain lines and offsets of small surveys.



Chains are made up of links which measure 200mm from centre to centre of each middle connecting ring and surveying brass handles are fitted at each end. Tally markers made of plastic or brass are attached at every whole metre position or at each tenth link. To avoid confusion in reading, chains are marked similarly from both end (E.g. Tally for 2m and 18m is the same) so that measurements may be commenced with either end of the chain

There are three different types of chains used in taking measurement namely:

- i. Engineers chain



ii. Günter's chain



2 **Steel Bands:**



This may be 30m, 50m or 100m long and 13mm wide. It has handles similar to those on the chain and is wound on a steel cross. It is more accurate but less robust than the chain. The operating tension and temperature for which it was graduated should be indicated on the band.

3 **Tapes:**

Tapes are used where greater accuracy of measurements are required, such as the setting out of buildings and roads. They are 15m or 30m long marked in metres, centimeter and millimeters. Tapes are classified into three types;



i. **Linen or Linen with steel wire woven into the fabric;**

These tapes are liable to stretch in use and should be frequently tested for length. They should never be used on work for which great accuracy is required.

ii. **Fibre Glass Tapes:** These are much stronger than lines and will not stretch in use.

iii. **Steel tapes:** These are much more accurate, and are usually used for setting out buildings and structural steel works. Steel tapes are available in various lengths up to 100m (20m and 30m being the most common) encased in steel or plastic boxes with a recessed winding lever or mounted on open frames with a folding winding lever.

4. **Arrows:**



Arrow consists of a piece of steel wire about 0.5m long, and is used for marking temporary stations. A piece of colored cloth, white or red ribbon is usually attached or tied to the end of the arrow to be clearly seen on the field.

5. Pegs



Pegs are made of wood 50mm x 50mm and some convenient length. They are used for points which are required to be permanently marked, such as intersection points of survey lines. Pegs are driven with a mallet and nails are set in the tops.

6. Ranging Rod:



These are poles of circular section 2m, 2.5m or 3m long, painted with characteristic red and white bands which are usually 0.5m long and tipped with a pointed steel shoe to enable them to be driven into the ground. They are used in the measurement of lines with the tape, and for marking any points which need to be seen.

7. Optical Square:

This instrument is used for setting out lines at right angle to main chain line. It is used where greater accuracy is required. There are two types of optical square, one using two mirrors and the other a prism.




- The mirror method is constructed based on the fact that a ray of light is reflected from a mirror at the same angle as that at which it strikes the mirror.
- The prism square method is a simplified form of optical square consisting of a single prism. It is used in the same way as the mirror square, but is rather more accurate.

8 Cross Staff:



This consists of two pairs of vanes set at right angle to each other with a wide and narrow slit in each vane. The instrument is mounted upon a pole, so that when it is set up it is at normal eye level. It is also used for setting out lines at right angle to the main chain line.

9. Clinometers

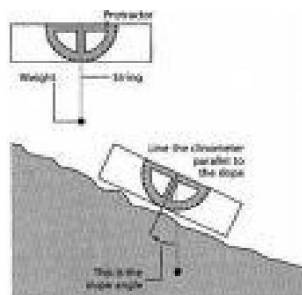

This instrument is used for measuring angles of ground slopes (slope angle). They are of several form, the common form is the WATKING'S CLINOMETER, which consist of a small disc of about 60mm diameter. A weighted ring inside the disc can be made to hang free and by sighting across this graduated ring angle of slopes can be read off. It is less accurate than Abney Level.

9 Abney Level



This instrument is generally used to obtain roughly the slope angle of the ground. It consists of a rectangular, telescopic tube (without lenses) about 125mm long with a graduated arc attached. A small bubble is fixed to the vernier arm, once the image of the bubble is seen reflected in the eyepiece the angle of the line of sight can be read off with the aid of the reading glass.

LECTURE 9

NECESSARY PRECAUTIONS IN USING CHAIN SURVEYING INSTRUMENTS

1. After use in wet weather, chains should be cleaned, and steel tapes should be dried and wiped with an oily rag.
2. A piece of colored cloth should be tied to arrow (or ribbon – attached) to enable them to be seen clearly on the field.
3. Ranging rods should be erected as vertical as possible at the exact station point.
4. The operating tension and temperature for which steel bands/tapes are graduated should be indicated.
5. Linen tapes should be frequently tested for length (standardized) and always after repairs.
6. Always keep tapes reeled up when not in use.

GENERAL PROCEDURE IN MAKING A CHAIN SURVEY

1. **Reconnaissance:** Walk over the area to be surveyed and note the general layout, the position of features and the shape of the area.
2. **Choice of Stations:** Decide upon the framework to be used and drive in the station pegs to mark the stations selected.
3. **Station Marking:** Station marks, where possible should be tied - in to a permanent objects so that they may be easily replaced if moved or easily found during the

survey. In soft ground wooden pegs may be used while rails may be used on roads or hard surfaces.

4. **Witnessing:** This consists of making a sketch of the immediate area around the station showing existing permanent features, the position of the stations and its description and designation. Measurements are then made from at least three surrounding features to the station point and recorded on the sketch.
The aim of witnessing is to re-locate a station again at much later date even by others after a long interval.

5. **Offsetting:-**Offsets are usually taken perpendicular to chain lines in order to dodge obstacles on the chain line.

6. **Sketching** the layout on the last page of the chain book, together with the date and the name of the surveyor, the longest line of the survey is usually taken as the base line and is measured first.

CRITERIA FOR SELECTING A SURVEY LINES/OFFSETS

During reconnaissance, the following points must be borne in mind as the criteria to provide the best arrangement of survey lines,

- a. **Few survey lines:** the number of survey lines should be kept to a minimum but must be sufficient for the survey to be plotted and checked.
- b. **Long base line:** A long line should be positioned right across the site to form a base on which to build the triangles.
- c. **Well conditioned triangle with angles greater than 30° and not exceeding 150° :** It is preferable that the arcs used for plotting should intersect as close as 90° in order to provide sharp definition of the stations point.
- d. **Check lines:** Every part of the survey should be provided with check lines that are positioned in such a way that they can be used for off- setting too, in order to save any unnecessary duplication of line.
- e. Obstacles such as steep slopes and rough ground should be avoided as far as possible.
- f. **Short offsets to survey lines (close feature preferably 2m) should be selected:** So that measuring operated by one person can be used instead of tape which needs two people.
- g. Stations should be positioned on the extension of a check line or triangle. Such points can be plotted without the need for intersecting arcs.

Ranging:

Ranging involves placing ranging poles along the route to be measured so as to get a straight line. The poles are used to mark the stations and in between the stations.

LECTURE 10

ERRORS IN SURVEYING

- Surveying is a process that involves observations and measurements with a wide range of electronic, optical and mechanical equipment some of which are very sophisticated.
- Despite the best equipments and methods used, it is still impossible to take observations that are completely free of small variations caused by errors which must be guarded against or their effects corrected.

TYPES OF ERRORS

1. Gross Errors

- These are referred to mistakes or blunders by either the surveyor or his assistants due to carelessness or incompetence.
- On construction sites, mistakes are frequently made by inexperienced Engineers or surveyors who are unfamiliar with the equipment and method they are using.
- These types of errors include miscounting the number of tapes length, wrong booking, sighting wrong target, measuring anticlockwise reading, turning instruments incorrectly, and displacement of arrows or station mark.
- Gross errors can occur at any stage of survey when observing, booking, computing or plotting and they would have a damaging effect on the results if left uncorrected.
- Gross errors can be eliminated only by careful methods of observing booking and constantly checking both operations.

2. Systematic or Cumulative Errors

- These errors are cumulative in effect and are caused by badly adjusted instrument and the physical condition at the time of measurement must be considered in this respect. Expansion of steel, frequently changes in electromagnetic distance (EDM) measuring instrument, etc are just some of these errors.
- Systematic errors have the same magnitude and sign in a series of measurements that are repeated under the same condition, thus contributing negatively or

positively to the reading hence, makes the readings shorter or longer.

- This type of error can be eliminated from a measurement using corrections (e.g. effect of tension and temperature on steel tape).
- Another method of removing systematic errors is to calibrate the observing equipment and quantify the error allowing corrections to be made to further observations.
- Observational procedures by re-measuring the quantity with an entirely different method using different instrument can also be used to eliminate the effect of systematic errors.

3. Random or Compensating Errors

- Although every precaution may be taken certain unavoidable errors always exist in any measurement caused usually by human limitation in reading/handling of instruments.
- Random errors cannot be removed from observation but methods can be adopted to ensure that they are kept within acceptable limits.
- In order to analyze random errors or variable, statistical principles must be used and in surveying their effects may be reduced by increasing the number of observations and finding their mean. It is therefore important to assume those random variables are normally distributed.

LECTURE 11

Corrections to Linear Measurement and their Application:-

The following corrections are to be applied to the linear measurements with a chain or a tape where such accuracy is required.

- (i) Pull correction,
- (ii) Temperature correction
- (iii) Standard length correction
- (iv) Sag correction
- (v) Slope correction
- (vi) Mean sea level correction.

Pull Correction:-

A chain or tape of nominal length „L” having cross sectional area of the link

or that of a tape, as the case may be, equal to A and standardized under a pull P_s is employed to measure a length at a pull P_F . If Young's modulus of elasticity of the

material is E the extension of its length is $= \frac{(P_F - P_s)L}{AE}$

The recorded length is less than the actual by this extension. The error is here, -ve, the actual length is obtained by adding the extension to L. The correction is + ve. If P_F is less than P_s the error will be +ve and correction -ve.

Temperature Correction:-

A chain or a tape of nominal length „L“ standardized at temperature T_s and having cross sectional area A is employed to measured length at temperature T_F being the coefficient of linear expansion of the material of the chain or tape per unit rise of temperature, the extension $= \alpha(T_F - T_s)L$.

If T_F is more than T_s , recorded length is less than the actual by the amount of extension. The error is -ve and the correction to the length L is +ve by the amount of extension. If the field temperature T_F is less than T_s the error is =+ve and the corrections is -ve.

Sag Correction:-

In case of suspended measurement across a span L the chain or tape sag to take the form of curve known as catenaries.

$$C_{sa} = \frac{(wl)^2}{24P^2} = \frac{W^2l}{24P}$$

Where w = weight of the tape per metre length $W =$

Total weight of the tape

P = pull applied (in N)

l_1 = The length of tape suspended between two supports

l = length of the tape = $n l_1$ (in m) Sag


correction is always negative.

LECTURE 12

TRIANGULATION

Because, at one time, it was easier to measure angles than it was distance, triangulation was the preferred method of establishing the position of control points.


Many countries used triangulation as the basis of their national mapping system. The procedure was generally to establish primary triangulation networks, with triangles having sides ranging from 30 to 50 km in length. The primary trig points were fixed at the corners of these triangles and the sum of the measured angles was correct to $\pm 3''$. These points were usually established on the tops of mountains to afford long, uninterrupted sight lines. The primary network was then noted with points at closer intervals connected into the primary triangles. This secondary network had sides of 10–20 km with a reduction in observational accuracy. Finally, a third order net, adjusted to the secondary control, was established at 3–5-km intervals and fourth-order points fixed by intersection. Figure 12.2 illustrates such a triangulation system established by the Ordnance Survey of Great Britain and used as control for the production of national maps. The base line and check base line would be measured by invar tapes in catenary and connected into the triangulation by angular extension procedures. This approach is classical triangulation, which is now obsolete. The more modern approach would be to measure the base lines with EDM equipment and to include many more measured lines in the network, to afford greater control of scale error. Although the areas involved in construction are relatively small compared with national surveys (resulting in the term „micro triangulation“) the accuracy required in establishing the control surveys is frequently of a very high order, e.g. long tunnels or dam deformation measurements.

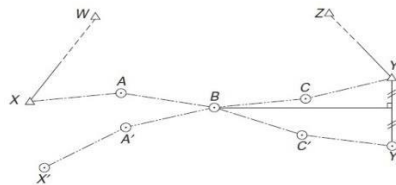



The principles of the method are illustrated by the typical basic figures shown in Figure . If all the angles are measured, then the scale of the network is obtained by the measurement of one side only, i.e. the base line. Any error, therefore, in the measurement of the base line will result in scale error throughout the network. Thus, in order to control this error, check baseline should be measured at intervals the scale

Error is defined as the difference between the measured and computed check base. Using the base line and adjusted angles the remaining sides of the triangles may be found and subsequently the coordinates of the control stations. Triangulation is best

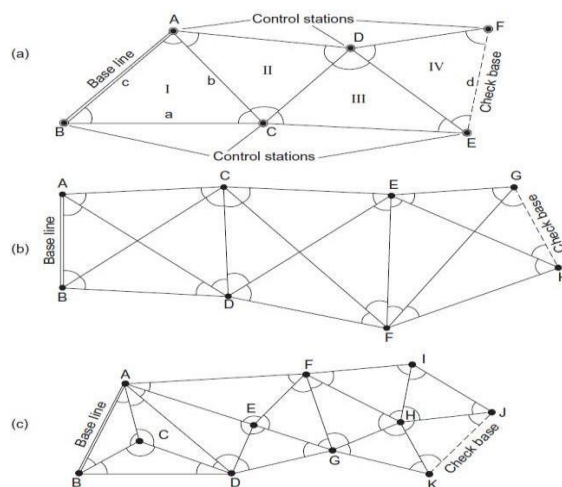

suited to open, hilly country, affording long sights well clear of intervening terrain. In urban areas, roof-top triangulation is used, in which the control stations are situated on the roofs of accessible buildings. (a) Chain of simple triangles, (b) braced quadrilaterals and (c) polygons with central points

LECTURE 13

General procedure:

- (1) Reconnaissance of the area, to ensure the best possible positions for stations and base lines.
 - (2) Construction of the stations.
 - (3) Consideration of the type of target and instrument to be used and also the method of observation.
- All of these depend on the precision required and the length of sights involved.
- (4) Observation of angles and base-line measurements.
 - (5) Computation: base line reduction, station and figural adjustment, coordinates of stations by direct methods.

A general introduction to triangulation has been presented, aspects of which will now be dealt with in detail.

(1) Reconnaissance is the most important aspect of any well-designed surveying project. Its main function is to ensure the best positions for the survey stations commensurate with well-conditioned figures, ease of access to the stations and economy of observation. A careful study of all existing maps or plans of the area is essential. The best position for the survey stations can be drawn on the plan and the overall shape of the network studied. While chains of single triangles are the most economic to observe, braced quadrilaterals provide many more conditions of adjustment and are at their strongest when square shaped. Using the contours of the plan, profiles between stations can be plotted to ensure indivisibility. Stereo-pairs of aerial photographs, giving a three-dimensional view of the terrain, are useful in this respect. Whilst every attempt should be made to ensure that there are no angles less than 25° , if a small angle cannot be avoided it should be situated opposite a side which does not enter into the scale computation. When the paper triangulation is complete, the area should then be visited and the site of every station carefully investigated. With the aid of binoculars, indivisibility between stations should be checked and ground-grazing rays avoided. Since the advent of EDM, base-line sitting is not so critical. Soil conditions should be studied to ensure that the ground is satisfactory for the construction of long-term survey stations. Finally, whilst the strength of the network is a function of its shape, the purpose of the survey stations should not be forgotten and their position located accordingly.


(2) Stations must be constructed for long-term stability. A complete referencing of the station should then be carried out in order to ensure its location at a future date.

(3) As already stated, the type of target used will depend on the length of sight involved and the accuracy required for highly precise networks, the observations may be carried out at night when refraction is minimal. In such a case, signal lamps would be the only type of target to use. For short sights it may be possible to use the precise targets shown in *Figure 13.1*. Whatever form the target takes, the essential considerations are that it should be capable of being accurately centered over the survey point and afford the necessary size and shape for accurate bisection at the observation distances used.

(4) In triangulation the method of directions would inevitably be used and the horizon closed. An appropriate number of sets would be taken on each face. The baseline and

check base would most certainly be measured by EDM, with all the necessary corrections made to ensure high accuracy.

(5) Since the use of computers is now well established, there is no reason why a least squares adjustment using the standard variation of coordinates method should not be carried out. Alternatively the angles may be balanced by simpler, less rigorous methods known as „equal shifts“. On completion, the sides may be computed using the sine rule and finally the coordinates of each survey point obtained. If the survey is to be connected to the national mapping system of the country, then all the baseline measurements must be reduced to MSL and multiplied by the local scale factor. As many of the national survey points as possible should be included in the scheme.

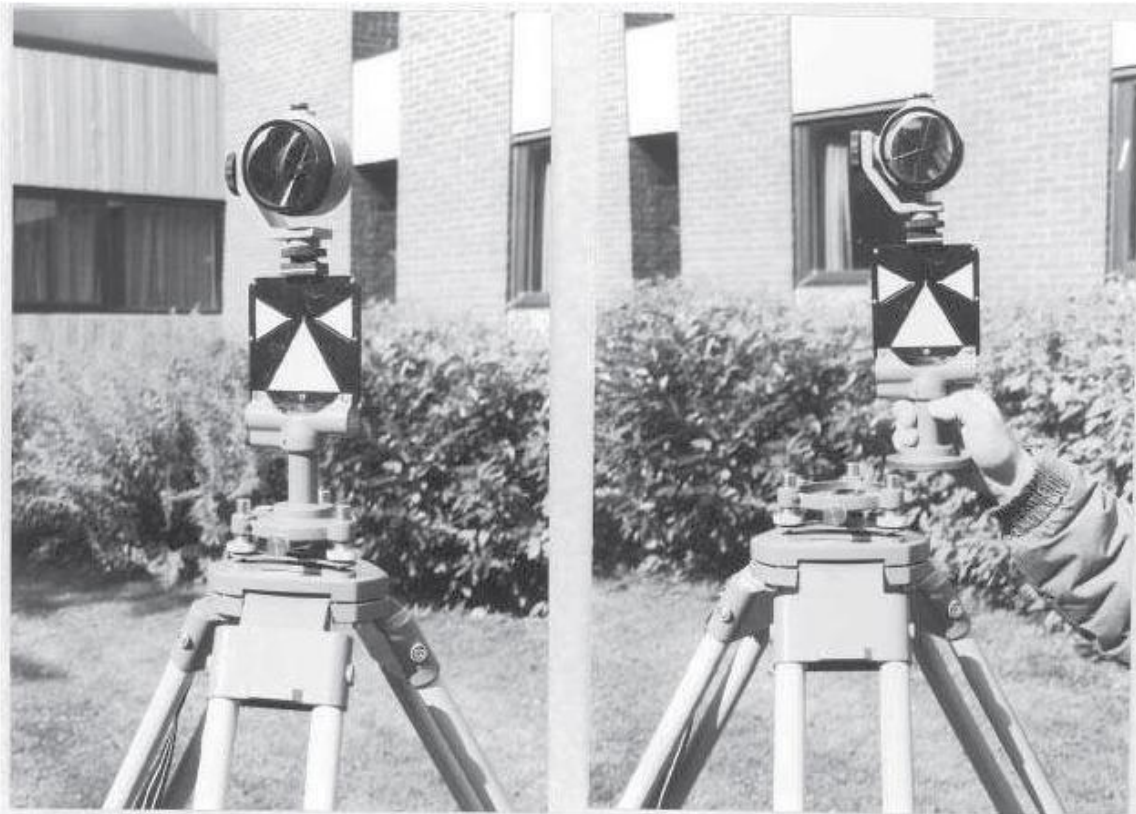

Interchangeable target and tribatch

LECTURE 14

Overcoming obstacles during chaining:

Agor (1993) classified the various types of obstacles encountered in the course of chaining into three

- Obstacles which obstruct ranging but not chaining
- Obstacles which obstruct chaining but not ranging
- Obstacle which obstruct both ranging and chaining

Obstacles that obstruct ranging but not chaining

Such a problem arises when a rising ground or a jungle area interrupts the chain line. Here the end stations are not interred visible.

There may be two cases:-

Case I :

The end stations may be visible from some intermediate points on the rising ground. In this case, reciprocal ranging is resorted to and the chaining is done by the stepping method.

Case II:

The end stations are not visible from intermediate points when a jungle area comes across the chain line. In this case the obstacle may be crossed over using a random line as explained below:

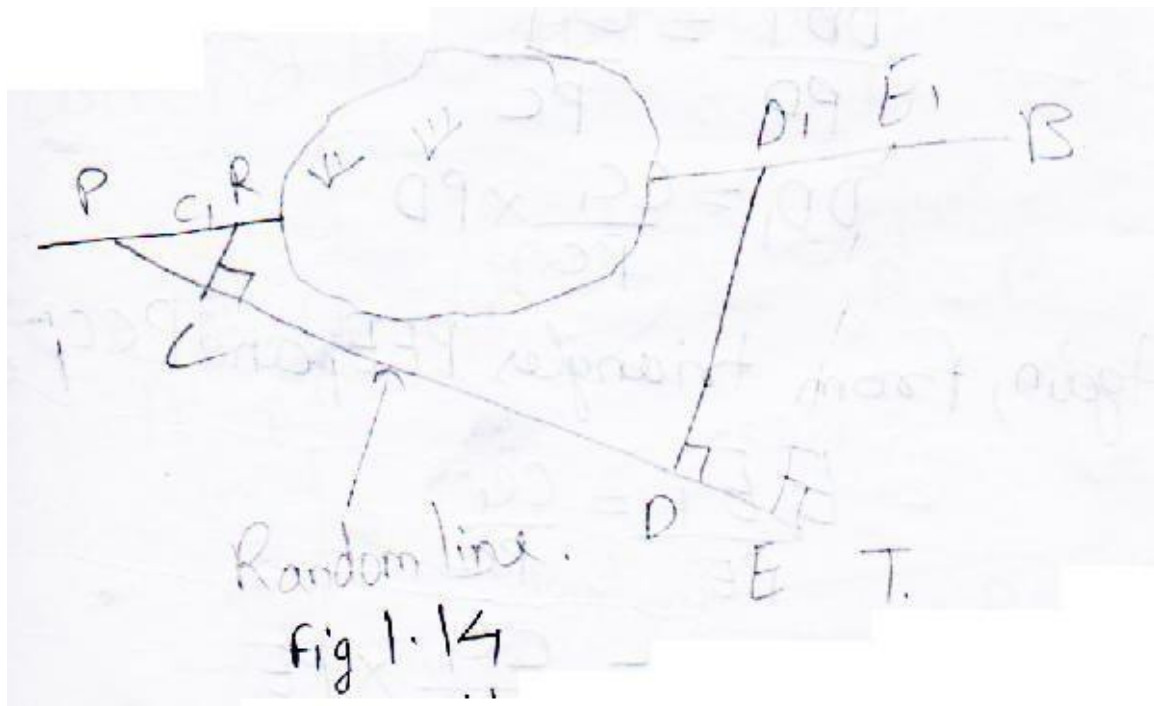


Fig 14.1 (1.14)

Let „AB“ be the actual chain line which can be ranged and extended because of interruption by a jungle. Let the chain line be extended up to „R“. A point „P“ is selected on the chain line and a random line „PT“ is taken in a suitable direction. Points C , D and E are selected on the random line and perpendicular are projected from them. The perpendicular at „C“ meets the chain line at C₁.

Theoretically, the perpendiculars at „D“ and „E“ will meet the chain line at D₁ and E₁. Now the distances PC, PD, PE and CC₁ are measured (Fig 14.1(1.14)) from triangles PDD₁ and PCC₁.

$$\frac{DD_1}{PD} = \frac{CC_1}{PC}$$

$$DD_1 = \frac{CC_1 \times PD}{PC} \text{-----(1)}$$

Again, from triangles PEE₁ and PCC₁ –

$$\frac{EE_1}{PE} = \frac{CC_1}{PC}$$

$$EE_1 = \frac{CC_1}{PC} \times PE \text{----- (2)}$$


From (1) and (2), the lengths DD_1 and EE_1 are calculated. These calculated distances are measured along the perpendiculars at 'D' and 'E'. Points D_1 and E_1 should lie in the chain line AB, which can be extended accordingly.

$$\text{Distance } PE_1 = \sqrt{PE^2 + EE_1^2}$$

Obstacles which obstruct chaining but not ranging:

Water bodies like lakes, ponds and rivers are typical examples of obstacles in this category. It is possible to chain around these obstacles by using the following methods.

i. By constructing rectangles: Chaining had reached A and encountered an obstacle. To get to B, mark A and B with an arrow. Set of perpendiculars AC and BD high enough to clear the obstacles. Join and measure DC which now equals AB. This allows chaining to continue from B.

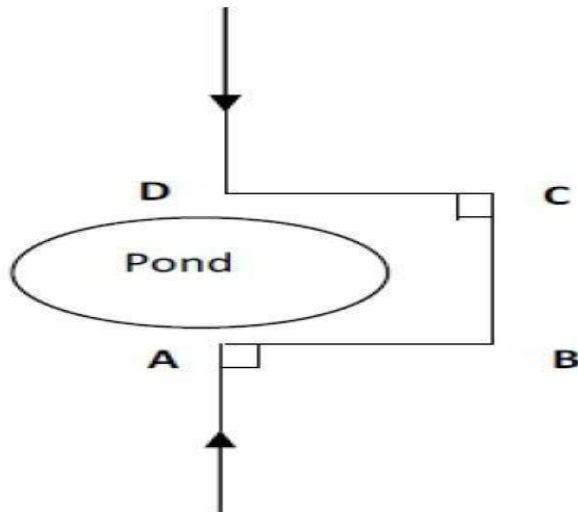

ii. By constructing similar triangles:

To continue chaining from B, fix a point C away from the obstacle. Range a pole at D to align with AC hence $AC = CD$. In line with BC range another point E in line with BC. Hence $BC = CE$.

Measure ED which equals AB hence chaining can continue from B.

[illegible]

LECTURE 15

UNIT 2

COMPASS SURVEYING

Introduction:

Another type of survey instrument that forms the subject of this section is the compass. Here, we will explain the meaning, types of compass survey and also introduce and discuss the concept of bearing.

Objectives

- To introduce the students to the meaning and types of compass survey
- To enable students understand the concept of bearing

Meaning and types of compass survey

In compass survey, the direction of the survey line is measured by the use of a magnetic compass while the lengths are by chaining or taping. Where the area to be surveyed is comparatively large, the compass survey is preferred, whereas if the area is small in extent and a high degree of accuracy is desired, then chain survey is adopted. However, where the compass survey is used, care must be taken to make sure that magnetic disturbances are not present. The two major primary types of survey compass are: the prismatic compass and surveyors compass



Compass surveys are mainly used for the rapid filling of the detail in larger surveys and for explanatory works. It does not provide a very accurate determination of the bearing of a line as the compass needle aligns itself to the earth's magnetic field which does not provide a constant reference point.

LECTURE 16

THE PRISMATIC COMPASS



This is an instrument used for the measurement of magnetic bearings. It is small and portable usually carried on the hand. This Prismatic Compass is one of the two main kinds of magnetic compasses included in the collection for the purpose of measuring magnetic bearings, with the other being the Surveyor's Compass. The main difference between the two instruments is that the surveyor's compass is usually larger and more accurate instrument, and is generally used on a stand or tripod.


- The prismatic compass on the other hand is often a small instrument which is held in the hand for observing, and is therefore employed on the rougher classes of work. The graduations on this prismatic compass are situated on a light aluminum ring fastened to the needle, and the zero of the graduations coincides with the south point of the needle. The graduations therefore remain stationary with the needle, and the index turns with the sighting vanes. Since the circle is read at the observer's (rather than the target's) end, the graduations run clockwise from the south end of the needle (0° to 360°), whereas in the surveyor's compass, the graduations run anti-clockwise from north.
- The prismatic attachment consists of a 45° reflecting prism with the eye and reading faces made slightly convex so as to magnify the image of the graduations. The prism is carried on a mounting which can be moved up and down between slides fixed on the outside of the case.
- The purpose of this up-and-down movement is to provide an adjustment for focusing. The image of the graduations is seen through a small circular aperture in the prism mounting, and immediately above this aperture is a small V cut on

top of the mounting, over which the vertical wire in the front vane may be viewed. Using the V cut, the vertical wire and the station whose bearing is required are viewed in one line, the bearing is directly read off the graduated arc at the point immediately underneath the vertical wire.

- The mirror located in front of the forward vane slides up and down the vane, and is hinged to fold flat over it or to rest inclined at any angle with it. This mirror is used for solar observations, or for viewing any very high object, and is not a normal fitting to a compass. The two circular discs in front of the back vane are dark glasses which can be swung in front of the vane when solar observations are being taken.

COMPONENTS OF A PRISMATIC COMPASS

Prismatic compass consists of a non-magnetic metal case with a glass top and contain the following:

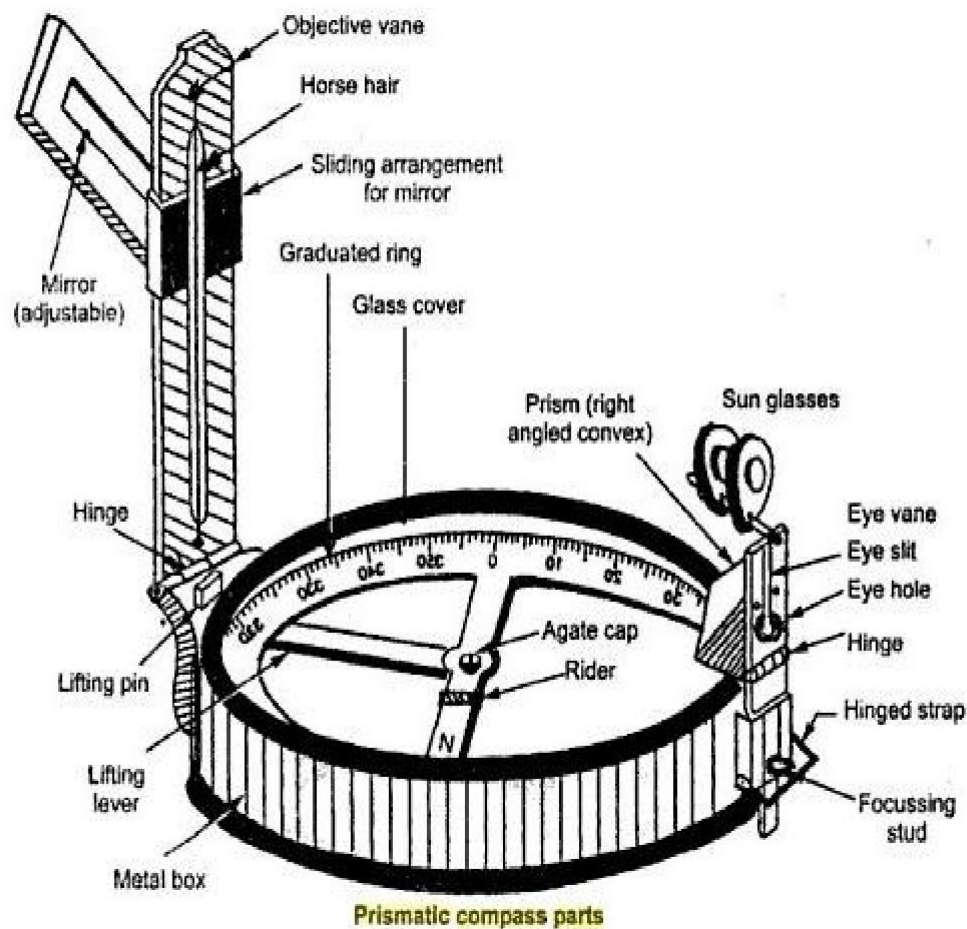

Elements of prismatic compass

● Cylindrical metal box:

Cylindrical metal box is having diameter of 8 to 12 cm. It protects the compass and forms entire casing or body of the compass. It protects the compass from dust,

rain etc.

● **Pivot:**

pivot is provided at the center of the compass and supports freely suspended magnetic needle over it.

● **lifting pin and lifting lever:**

lifting pin is provided just below the sight vane. When the sight vane is folded, it presses the lifting pin. The lifting pin with the help of lifting lever then lifts the magnetic needle out of pivot point to prevent damage to the pivoted.

● **Magnetic needle:**

Magnetic needle is the heart of the instrument. This needle measures angle of a line from magnetic meridian as the needle always remains pointed towards north South Pole at two ends of the needle when freely suspended on any support.

● **Graduated circle or ring:**

This is an aluminum graduated ring marked with 0° to 360° to measures all possible bearings of lines, and attached with the magnetic needle. The ring is graduated to half degree.

● **Prism :**

prism is used to read graduations on ring and to take exact reading by compass. It is placed exactly opposite to object vane. The prism hole is protected by prism cap to protect it from dust and moisture.

● **Object vane:**

Object vane is diametrically opposite to the prism and eye vane. The object vane is carrying a horse hair or black thin wire to sight object in line with eyesight.

● **Eye vane:**

Eye vane is a fine slit provided with the eye hole at bottom to bisect the object from slit.

● **Glass cover:**

It covers the instrument box from the top such that needle and graduated ring is seen from the top.

● **Sun glasses:**

These are used when some luminous objects are to be bisected.

● **Reflecting mirror:**

It is used to get image of an object located above or below the instrument level while bisection. It is placed on the object vane.

● **Spring break or brake pin:**

to damp the oscillation of the needle before taking a reading and to bring it to rest quickly, the light spring break attached to the box is brought in contact with the edge of the ring by gently pressing inward the brake pin

LECTURE 17

Temporary adjustment of prismatic compass

- The following procedure should be adopted after fixing the prismatic compass on the tripod for measuring the bearing of a line.
- **Centering :**
Centering is the operation in which compass is kept exactly over the station from where the bearing is to be determined. The centering is checked by dropping a small pebble from the underside of the compass. If the pebble falls on the top of the peg then the centering is correct, if not then the centering is corrected by adjusting the legs of the tripod.
- **Leveling :**
Leveling of the compass is done with the aim to freely swing the graduated circular ring of the prismatic compass. The ball and socket arrangement on the tripod will help to achieve a proper level of the compass. This can be checked by rolling round pencil on glass cover.
- **Focusing:**
The prism is moved up or down in its slide till the graduations on the aluminum ring are seen clear, sharp and perfect focus. The position of the prism will depend upon the vision of the observer.

OPERATION PROCEDURE

- Remove the corner and open out the prism and window, holding the compass as level as possible.
- Then focus the prism by raising or lowering its case until the divisions appear sharp and clear. If necessary with the needle on to its pivot.
- Holding the compass box with the thumb under the prism and the forefinger near the stud, sight through the objector station lowering the eye to read the required bearing as soon as the needle comes to rest naturally.
- The bearing read will be a forward bearing and normally a “whole circle” bearing clockwise angle between 0° to 360° .

LECTURE 18

VARIATION IN DECLINATION

The position of the magnetic poles is not fixed and the North magnetic pole tends to wander more than the south causing alterations in the positions of the isogonic lines from time to time. The angle of declination at any point is therefore not constant subject to the following variations;

1. Secular Variation:

This causes the largest variation in magnetic declination. It is a slow continuous swing with a cycle of about 400 to 500 years. Because of this large movement, the date, the declination and the approximate rate of annual change should be given for any magnetic orientation of survey.

2. Diurnal Variation:

This is a swing of the compass needle about its mean daily position.

3. Periodic Variation:

This is a minor variation of the magnetic meridian during the week, a lunar month, year, eleven years, etc.

4. Irregular Variation: These are caused by magnetic storms which can produce sudden variations of the magnetic meridian.

Magnetic Bearing

The magnetic bearing of a survey line is the angle between the direction of the line and the direction of the magnetic meridian at the beginning of the line.

Magnetic Meridian

- The magnetic meridian at any place is the direction obtained by observing the position of a freely supported magnetized needle when it comes to rest uninfluenced by local attracting forces.
- Magnetic meridians run roughly north –south and follow the varying trend of the earth's magnetic field. The direction of a magnetic meridian does not coincide with the true or geographical meridian which gives the direction of the true North pole except in certain places.

Angle of Declination:

It is defined as the angle between the direction of the magnetic meridian and the true meridian at any point.

LECTURE 19

Surveyor's Compass:

Similar to the prismatic compass but with few modifications, the surveyors compass is an old form of compass used by surveyors. It is used to determine the magnetic bearing of a given line and is usually used in connection with the chain or compass survey.



Bearing

The bearing is the angular direction measured clockwise starting from North with reference to the observer. The reference North may be true or magnetic. While the true bearing is the angular direction measured in a place with the direction of true or geographical north; the magnetic bearing is the angle which it makes with the direction of Magnetic North measured in the clockwise direction.

LECTURE 20


Back and Fore bearing:

Introduction:

In this section, we will examine the back and fore bearing; and the steps to be taken when traversing with compass survey.

Back and fore bearing

Fore bearing is the compass bearing of a place taken from a station to the other in the direction that the survey is being carried out. The back bearing in the other hand is the bearing in the opposite direction i.e. the bearing taken backwards from the next station to its preceding station that the fore bearing was taken. The difference between BB and FB is always 180° .

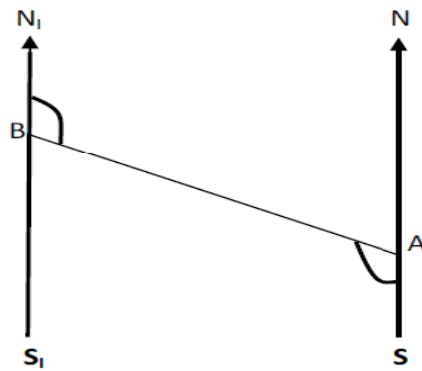

Back and fore bearing

If B is sighted from an observer at A, and the NS and N_1S_1 are the magnetic NS lines, then Forward bearing (FB) = $\angle N A S + \angle S A B$

Back bearing BA = $\angle N_1 B A$

\therefore Back Bearing BA = Forward Bearing AB - 180°

If the observer relocates to B and observes A, then forward bearing (FB) BA = $\angle N_1 B A$ and back bearing (AB) = $\angle N A S + \angle S A B$. Hence, we can conclude that Forward Bearing = $\angle N_1 B A + 180^\circ$. As a general rule, if the Fore Bearing is less than 180° , add 180° to get the Back Bearing, and if the Fore Bearing is greater than 180° , then subtract 180° to get the Back Bearing.

LECTURE 21

Traversing and plotting with the compass survey:

Traversing with the compass involves taking the bearing along a series of connecting straight lines and in the same time measuring the distances with the tape. The compass is read at each point and a back bearing is equally taken to serve as a check. This continues until the traverse closes.

Choosing a suitable scale, the traverse is then plotted taking into consideration the general shape of the area.

Observing Bearing of Line

- ⊙ Consider a line AB of which the magnetic bearing is to be taken.
- ⊙ By fixing the ranging rod at station B we get the magnetic bearing of needle with respect to North Pole.
- ⊙ The enlarged portion gives actual pattern of graduations marked on

ring. Designation of bearing

- ⊙ The bearing are designated in the following two systems:-
- ⊙ 1) Whole Circle Bearing System.(W.C.B)
- ⊙ 2) Quadrant Bearing System.(Q.B)

Whole circle bearing system(W.C.B.)

- ⊙ The bearing of a line measured with respect to magnetic meridian in clockwise direction is called magnetic bearing and its value varies between 0° to 360° .
- ⊙ The quadrant starts from north and progresses in a clockwise direction as the first quadrant is 0° to 90° in clockwise direction, 2nd 90° to 180° , 3rd 180° to 270° , and up to 360° is 4th one.

Quadrantal bearing system (Q.B.)

- ⊙ In this system, the bearing of survey lines are measured with respect to north line or south line whichever is the nearest to the given survey line and either in clockwise direction or in anti clockwise direction.

Reduced bearing (R.B)

- ⊙ When the whole circle bearing is converted into Quadrantal bearing, it is termed as “REDUCED BEARING”.
- ⊙ Thus, the reduced bearing is similar to the Quadrantal bearing.

- ⊙ Its values lies between 0° to 90° , but the quadrant should be mentioned for proper designation.

The following table should be remembered for conversion of WCB to RB.

W.C.B OF ANY LINE	QUADRANT IN WHICH IT LIES	RULES FOR CONVERSION	QUADRANT
0 TO 90	I	$RB=WCB$	N-E
90 TO 180	II	$RB=180-WCB$	S-E
180 TO 270	III	$RB =WCB-180^{\circ}$	S-W
270 TO 360	IV	$RB=360^{\circ} - WCB$	N-W

LECTURE 22

Error in compass survey (Local attraction & observational error):

Local attraction is the influence that prevents magnetic needle pointing to magnetic north pole

Unavoidable substance that affect are

- Magnetic ore
- Underground iron pipes
- High voltage transmission line
- Electric pole etc.

Influence caused by avoidable magnetic substance doesn't come under local attraction such as instrument, watch wrist, key etc

Detection of Local attraction

- By observing the both bearings of line (F.B. & B.B.) and noting the difference (180° in case of W.C.B. & equal magnitude in case of R.B.)
- We confirm the local attraction only if the difference is not due to observational errors.

If detected, that has to be eliminated two methods of elimination

- First method
- Second method

First method

- Difference of B.B. & F.B. of each lines of traverse is checked to note if they differ by correctly or not.
- The one having correct difference means that bearing measured in those stations are free from local attraction
- Correction is accordingly applied to rest of station.
- If none of the lines have correct difference between F.B. & B.B., the one with minimum error is balanced and repeat the similar procedure.
- Diagram is good friend again to solve the numerical problem.

LECTURE 23

Second method


- Based on the fact that the interior angle measured on the affected station is right.
- All the interior angles are measured
- Check of interior angle – sum of interior angles = $(2n-4) \times \text{right angle}$, where n is number of traverse side
- Errors are distributed and bearing of lines are calculated with the corrected angles from the lines with unaffected station.

Checks in closed Traverse


- Errors in traverse is contributed by both angle and distance measurement
- Checks are available for angle measurement but
- There is no check for distance measurement
- For precise survey, distance is measured twice, reverse direction second time

Checks for angular error are available


- Interior angle, sum of interior angles = $(2n-4) \times \text{right angle}$, where n is number of traverse side
- Exterior angle, sum of exterior angles = $(2n+4) \times \text{right angle}$, where n is number of traverse side

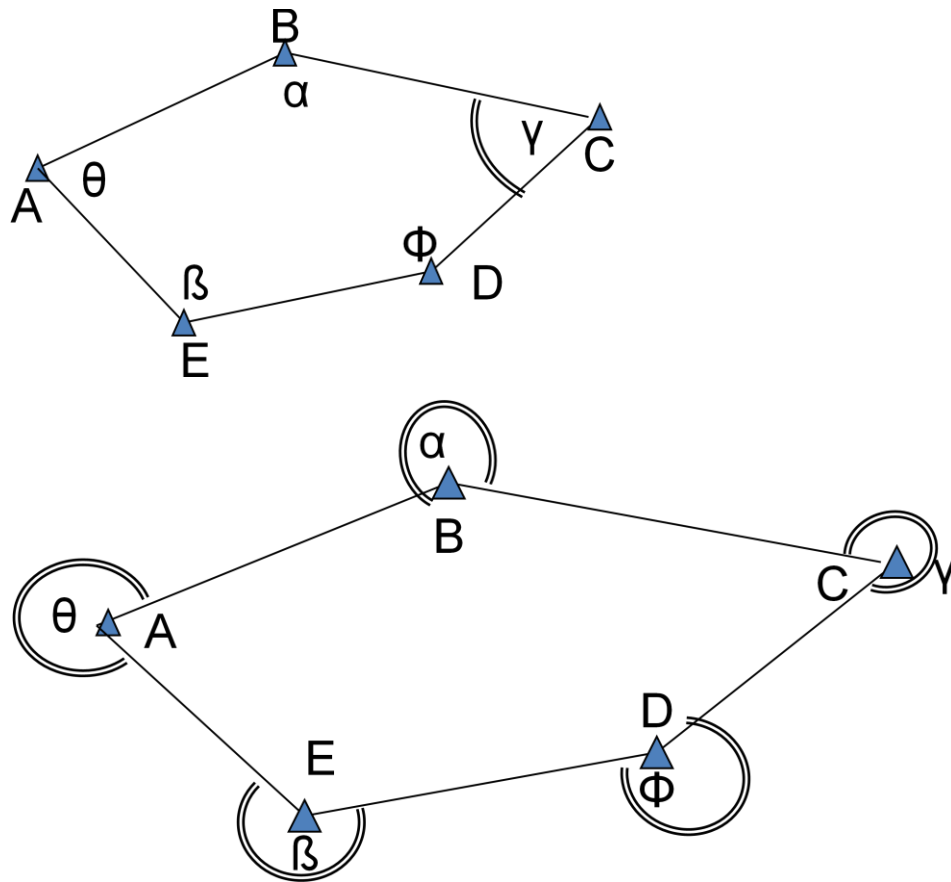


- Deflection angle – algebraic sum of the deflection angle should be 0° or 360° .
- Bearing – The fore bearing of the last line should be equal to its back bearing $\pm 180^\circ$ measured at the initial station.

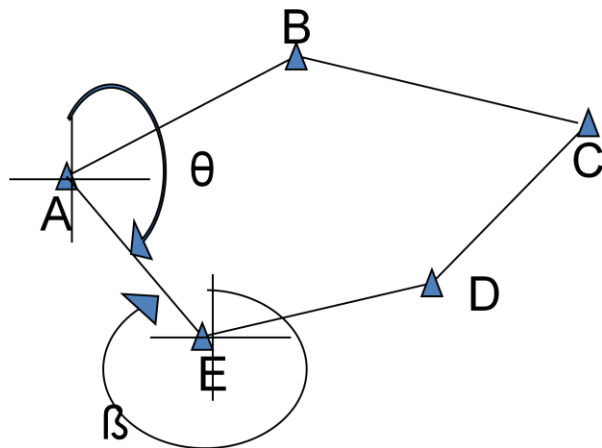



β should be $= \theta + 180^\circ$






















THEODOLITE SURVEYING

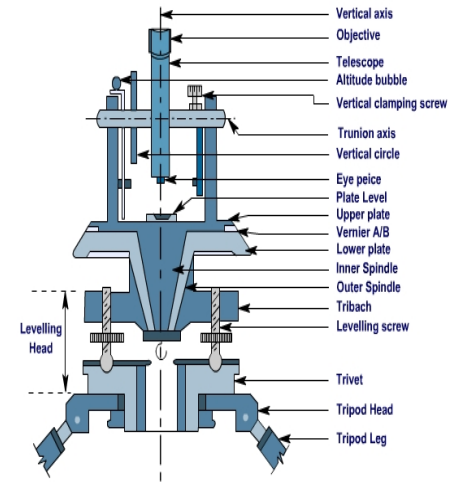



Figure 20.4 Sectional view of a Theodolite

THEODOLITE SURVEYING




So far we have been measuring horizontal angles by using a *Compass* with respect to *meridian*, which is *less accurate* and also it is not possible to measure vertical angles with a Compass.

So when the objects are at a considerable distance or situated at a considerable elevation or depression ,it becomes necessary to measure horizontal and vertical angles more precisely. So these measurements are taken by an instrument known as a *theodolite*.



THEODOLITE SURVEYING


The system of surveying in which the angles are measured with the help of a theodolite, is called Theodolite surveying.




THEODOLITE

The Theodolite is a most accurate surveying instrument mainly used for :

- **Measuring horizontal and vertical angles.**
- **Locating points on a line.**
- **Prolonging survey lines.**
- **Finding difference of level.**
- **Setting out grades**
- **Ranging curves**
- **Tacheometric Survey**



TRANSIT VERNIER THEODOLITE

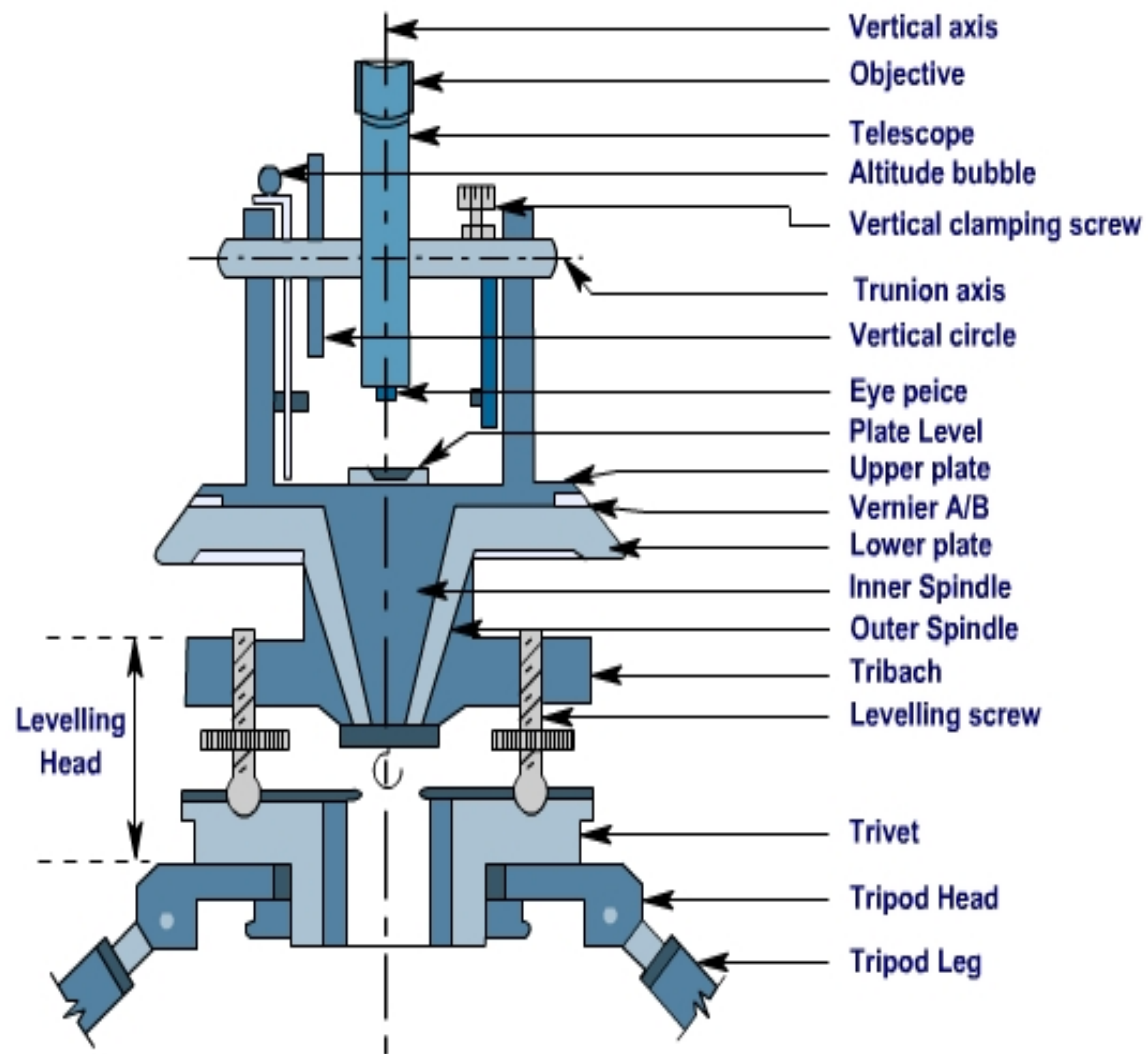

THEODOLITE SURVEYING



TRANSIT VERNIER THEODOLITE


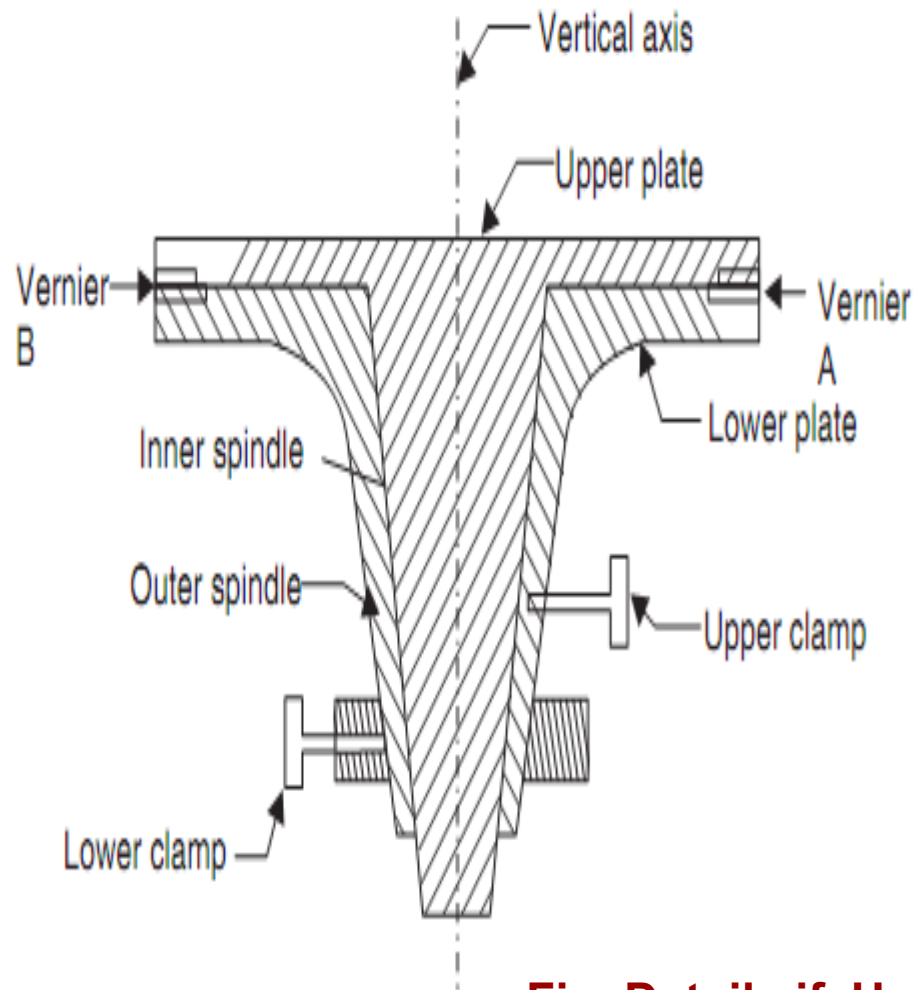


Fig. Details of Upper & Lower Plates.



TRANSIT VERNIER THEODOLITE

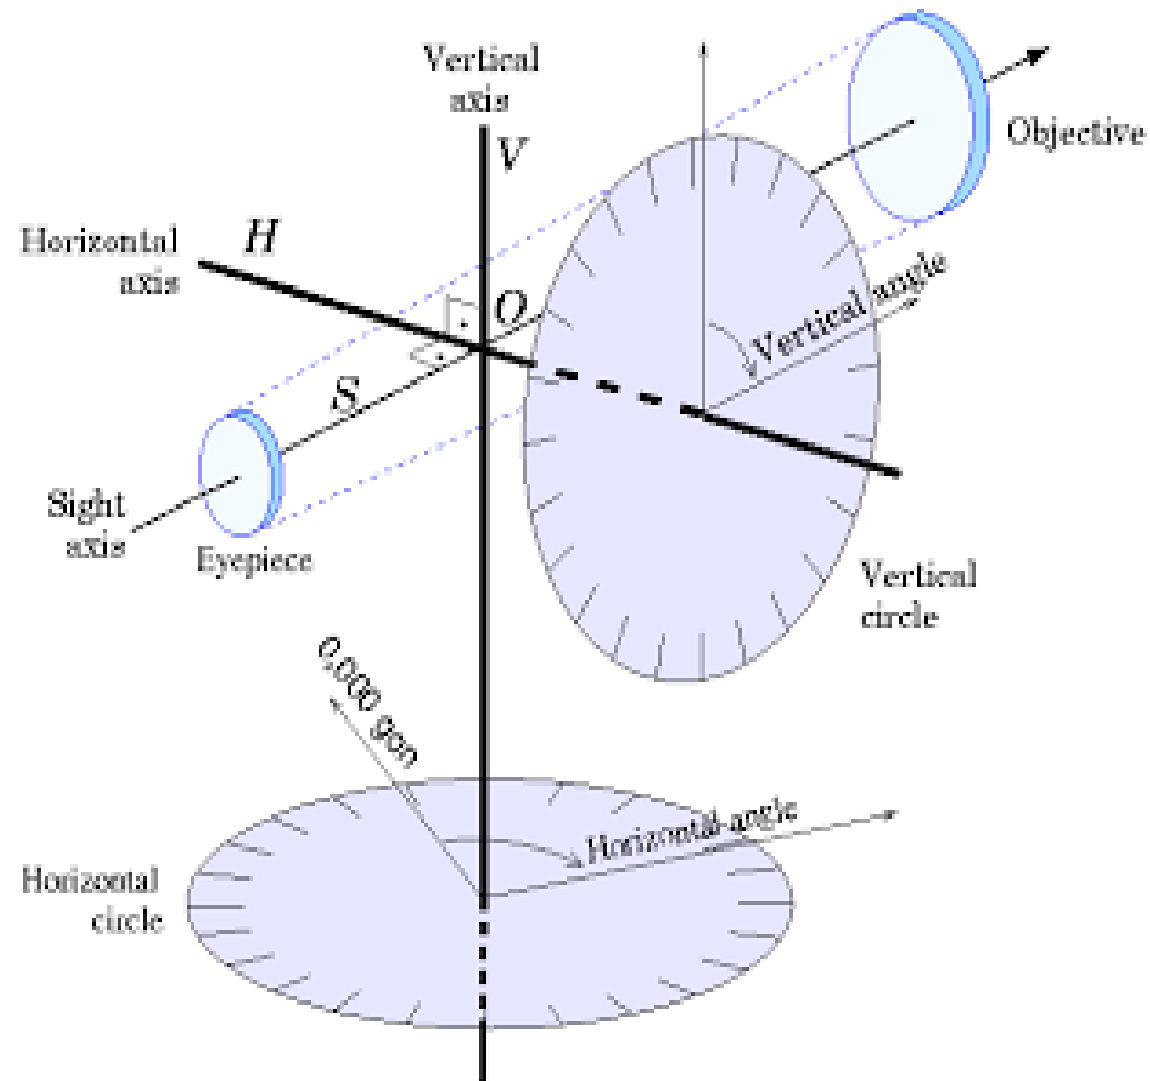

THEODOLITE SURVEYING



CLASSIFICATION OF THEODOLITES

Theodolites may be classified as ;

A.

- i) Transit Theodolite.**
- ii) Non Transit Theodolite.**

B.


- i) Vernier Theodolites.**
- ii) Micrometer Theodolites.**



CLASSIFICATION OF THEODOLITES

A. Transit Theodolite: A theodolite is called a transit theodolite when its telescope can be transited i.e revolved through a complete revolution about its horizontal axis in the vertical plane, whereas in a-

Non-Transit type, the telescope cannot be transited. They are inferior in utility and have now become *obsolete*.




CLASSIFICATION OF THEODOLITES

B. Vernier Theodolite: For reading the graduated circle if verniers are used ,the theodolite is called as a Vernier Theodolite.

Whereas, if a *micrometer* is provided to read the graduated circle the same is called as a **Micrometer Theodolite.**

Vernier type theodolites are commonly used .




SIZE OF THEODOLITE

A theodolite is designated by diameter of the graduated circle on the lower plate.

The common sizes are *8cm to 12 cm* while *14 cm to 25 cm* instrument are used for *triangulation work*.

Greater accuracy is achieved with larger theodolites as they have bigger graduated circle with larger divisions hence used where the survey works require high degree of accuracy.




DESCRIPTION OF A

TRANSIT VERNIER THEODOLITE

A Transit vernier theodolite essentially consist of the following :


- | | |
|---------------------------------|-------------------------|
| 1. Levelling Head. | 6. T- Frame. |
| 2. Lower Circular Plate. | 7. Plumb –bob. |
| 3. Upper Plate. | 8. Tripod Stand. |
| 4. Telescope. | |
| 5. Vernier Scale. | |



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

1. Centering : Centering means setting the theodolite exactly over an instrument- station so that its vertical axis lies immediately above the station- mark. It can be done by means of plumb bob suspended from a small hook attached to the vertical axis of the theodolite.


The centre shifting arrangement if provided with the instrument helps in easy and rapid performance of the centring.



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

2. Transiting :

Transiting is also known as *plunging* or *reversing*. It is the process of turning the telescope about its horizontal axis through 180^0 in the vertical plane thus bringing it upside down and making it point , exactly in opposite direction.



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

3. Swinging the telescope

It means turning the telescope about its vertical axis in the horizontal plane.

A swing is called *right* or *left* according as the telescope is rotated clockwise or counter clockwise.



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

4. Face Left

If the vertical circle of the instrument is on the left side of the observer while taking a reading ,the position is called the *face left* and

the observation taken on the horizontal or vertical circle in this position, is known as the *face left observation*



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

5. Face Right

If the vertical circle of the instrument is on the right side of the observer while taking a reading ,the position is called the *face right* and

the observation taken on the horizontal or vertical circle in this position, is known as the *face right observation*.




TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

6. Changing Face


It is the operation of bringing the vertical circle to the right of the observer ,if originally it is to the left , and vice – versa.

It is done in two steps; Firstly revolve the telescope through 180^0 in a vertical plane and then rotate it through 180^0 in the horizontal plane i.e first transit the telescope and then swing it through 180^0 .



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

7. Line of Collimation

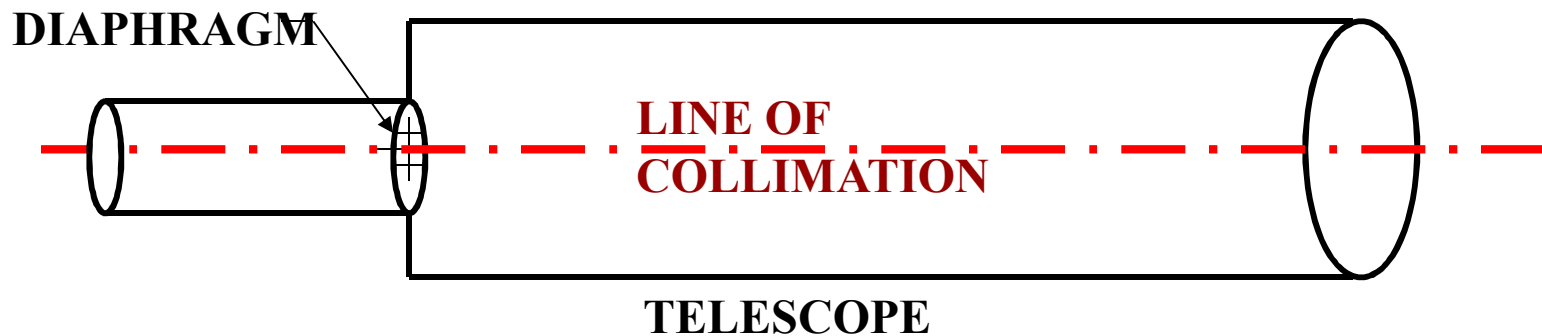


It is also known as the **line of sight**. It is an imaginary line joining the intersection of the cross-hairs of the diaphragm to the optical centre of the object-glass and its continuation.



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

8. Axis of the telescope

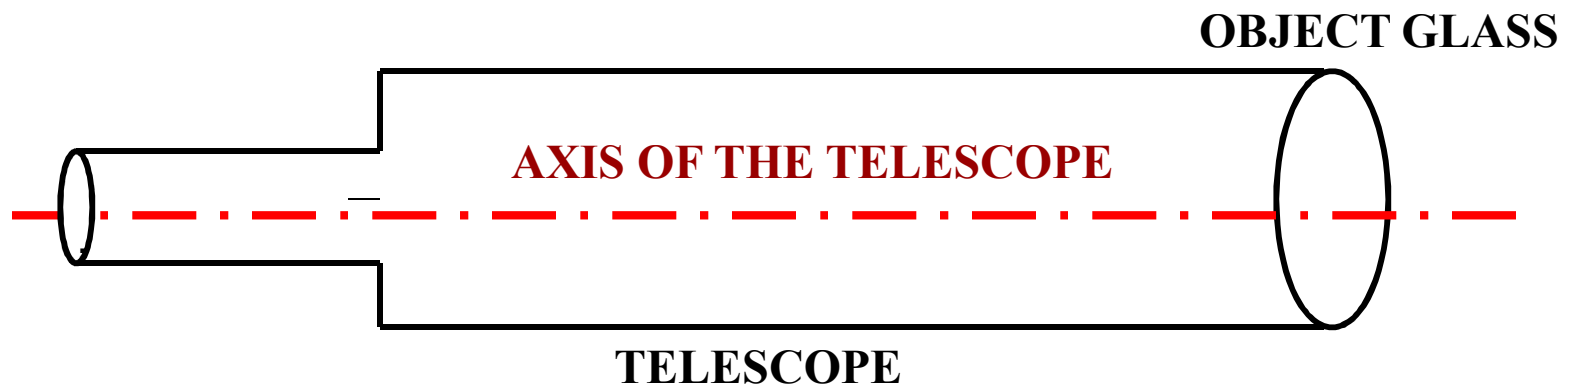

It is also known as an imaginary line joining the optical centre of the object-glass to the centre of eye piece.




TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

9. Axis of the Level Tube

It is also called the **bubble line**.

It is a *straight* line *tangential* to the *longitudinal curve* of the level tube at the centre of the tube. It is **horizontal** when the **bubble** is in the **centre**.



TERMS USED IN MANIPULATING A TRANSIT VERNIER THEODOLITE.

10. Vertical Axis

It is the axis about which the telescope can be rotated in the horizontal plane.

11. Horizontal Axis

It is the axis about which the telescope can be rotated in the vertical plane.

It is also called the *trunion axis*.




ADJUSTMENT OF A THEODOLITE

The adjustments of a theodolite are of two kinds :-

1. Permanent Adjustments.

2. Temporary Adjustments.

1) Permanent adjustments: The permanent adjustments are made to establish the relationship between the *fundamental lines* of the theodolite and , once made , they last for a long time. They are essential for the accuracy of observations.



ADJUSTMENT OF A THEODOLITE

1. Permanent adjustments: The permanent adjustments in case of a transit theodolites are :-


- i) Adjustment of Horizontal Plate Levels.** The axis of the plate levels must be perpendicular to the vertical axis.
- ii) Collimation Adjustment.** The line of collimation should coincide with the axis of the telescope and the axis of the objective slide and should be at right angles to the horizontal axis.
- iii) Horizontal axis adjustment.** The horizontal axis must be perpendicular to the vertical axis.



ADJUSTMENT OF A THEODOLITE

1. Permanent adjustments (contd.):

- iv) Adjustment of Telescope Level or the Altitude Level Plate Levels.** The axis of the telescope levels or the altitude level must be parallel to the line of collimation.
- v) Vertical Circle Index Adjustment.** The vertical circle vernier must read zero when the line of collimation is horizontal.




ADJUSTMENT OF A THEODOLITE

2. Temporary Adjustment

The temporary adjustments are made at each set up of the instrument before we start taking observations with the instrument. There are three temporary adjustments of a theodolite:-


- i) Centering.**
- ii) Levelling.**
- iii) Focussing.**



MEASUREMENT OF HORIZONTAL ANGLES:

There are three methods of measuring horizontal angles:-

- i) Ordinary Method.**
- ii) Repetition Method.**
- iii) Reiteration Method.**




MEASUREMENT OF HORIZONTAL ANGLES:

i) **Ordinary Method. To measure horizontal angle AOB:-**


i) Set up the theodolite at station point **O** and level it accurately.

ii) Set the vernier **A** to the zero or 360^0 of the horizontal circle. Tighten the upper clamp.

iii) Loosen the lower clamp. Turn the instrument and direct the telescope towards **A** to bisect it accurately with the use of tangent screw. After bisecting accurately check the reading which must still read zero. Read the vernier **B** and record both the readings.

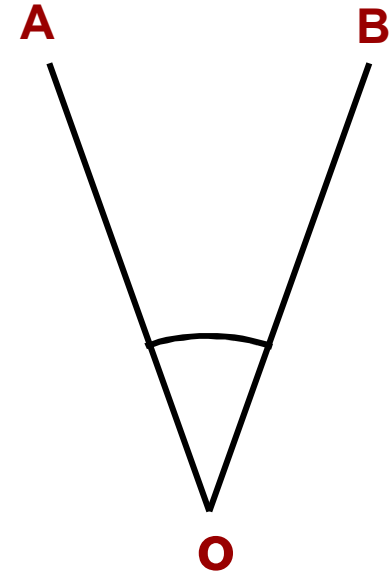

HORIZONTAL ANGLE AOB




MEASUREMENT OF HORIZONTAL ANGLES:


i) **Ordinary Method.** To measure horizontal angle AOB:-

iv) Loosen the upper clamp and turn the telescope clockwise until line of sight bisects point **B** on the right hand side. Then tighten the upper clamp and bisect it accurately by turning its tangent screw.

v) Read both verniers. The reading of the vernier A which was initially set at zero gives the value of the angle **AOB** directly and that of the other vernier B by deducting **180°**. The mean of the two vernier readings gives the value of the required angle **AOB**.

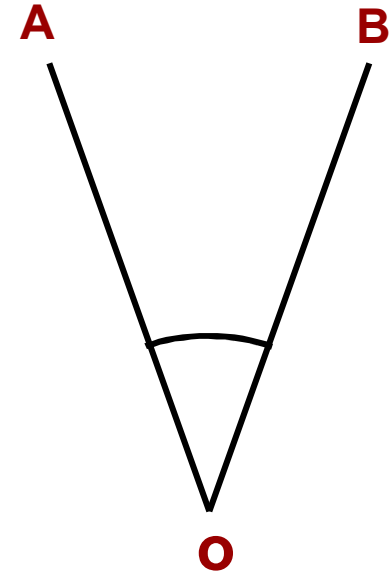

HORIZONTAL ANGLE AOB




MEASUREMENT OF HORIZONTAL ANGLES:

i) **Ordinary Method.** To measure horizontal angle AOB:-

vi) Change the face of the instrument and repeat the whole process. The mean of the two vernier readings gives the second value of the angle **AOB** which should be approximately or exactly equal to the previous value.

vii) The mean of the two values of the angle **AOB**, one with face left and the other with face right, gives the required angle free from all instrumental errors.

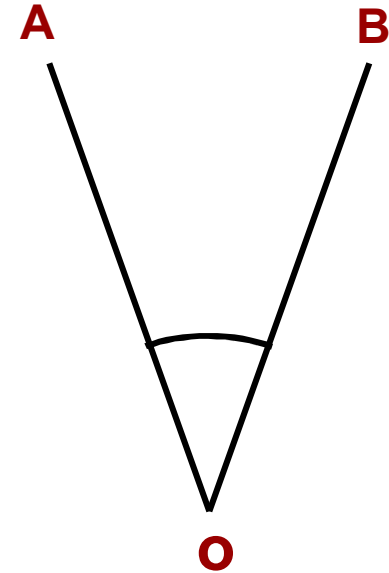

HORIZONTAL ANGLE AOB




MEASUREMENT OF HORIZONTAL ANGLES:


ii) Repetition Method.

This method is used for **very accurate work**. In this method, the same angle is added several times mechanically and the correct value of the angle is obtained by dividing the accumulated reading by the no. of repetitions.

The **No. of repetitions** made usually in this method is **six**, three with the face left and three with the face right. In this way, angles can be measured to a finer degree of accuracy than that obtainable with the least count of the vernier.

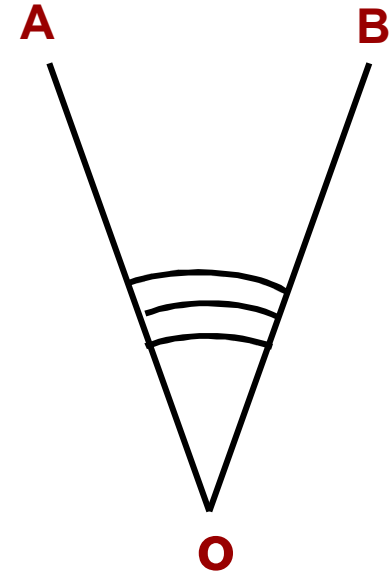

HORIZONTAL ANGLE AOB




MEASUREMENT OF HORIZONTAL ANGLES:

ii) Repetition Method.

To measure horizontal angle by repetitions:-

- i) Set up the theodolite at starting point O and level it accurately.
- ii) Measure The horizontal angle AOB.
- iii) Loosen the lower clamp and turn the telescope clock – wise until the object (A) is sighted again. Bisect B accurately by using the upper tangent screw. The verniers will now read the *twice* the value of the angle now.

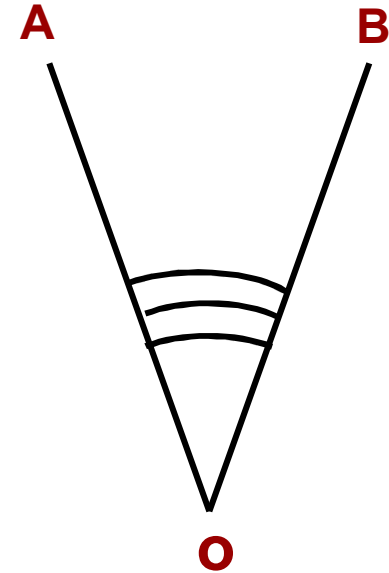


HORIZONTAL ANGLE AOB



MEASUREMENT OF HORIZONTAL ANGLES:

- ii) Repetition Method contd...
- iv) Repeat the process until the angle is repeated the required number of times (usually 3). Read again both verniers . The final reading after *n repetitions* should be approximately *n X (angle)*. *Divide the sum by the number of repetitions* and the result thus obtained gives the *correct value of the angle AOB*.
- v) Change the face of the instrument. Repeat exactly in the same manner and find another value of the angle **AOB**. The *average* of two readings gives the required precise value of the angle **AOB**.

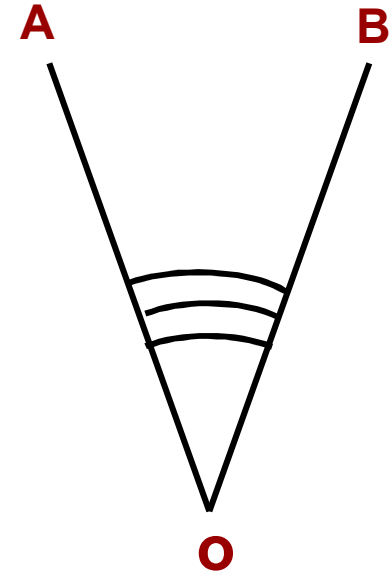

HORIZONTAL ANGLE AOB




MEASUREMENT OF HORIZONTAL ANGLES:

iii) Reiteration Method.

This method is another *precise* and comparatively *less tedious* method of measuring the horizontal angles.

It is generally preferred when *several angles* are to be measured at a particular station.

This method consists in measuring several angles successively and finally closing the horizon at the starting point. The *final reading* of the vernier **A** should be *same* as its *initial reading*.

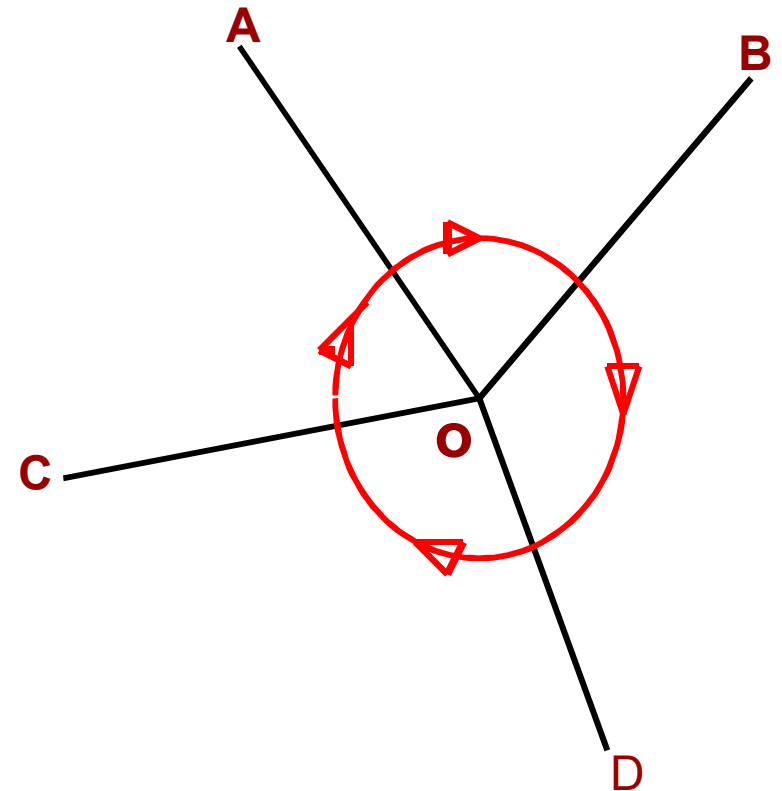

Reiteration Method



MEASUREMENT OF HORIZONTAL ANGLES:


iii) Reiteration Method.

...If not, the discrepancy is equally distributed among all the measured angles.

Procedure

Suppose it is required to measure the angles AOB, BOC and COD. Then to measure these angles by repetition method :

i) Set up the instrument over station point O and level it accurately.

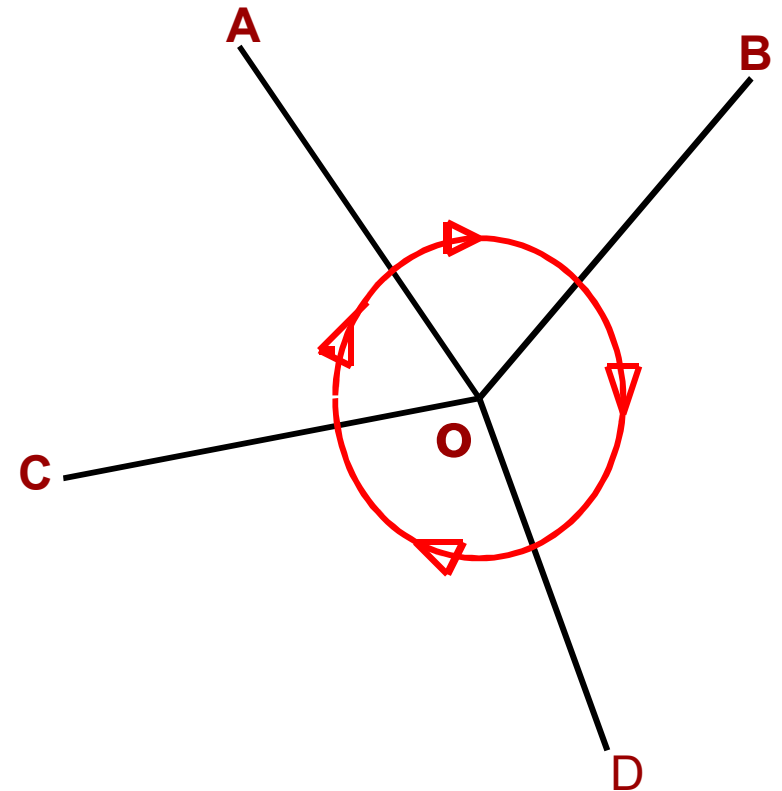

Reiteration Method




MEASUREMENT OF HORIZONTAL ANGLES:

iii) Reiteration Method.

Procedure

ii) Direct the telescope towards point A which is known as referring object. Bisect it accurately and check the reading of vernier as 0 or 360^0 . Loosen the lower clamp and turn the telescope clockwise to sight point B exactly. Read the verniers again and The mean reading will give the value of angle AOB.

iii) Similarly bisect C & D successively, read both verniers at-

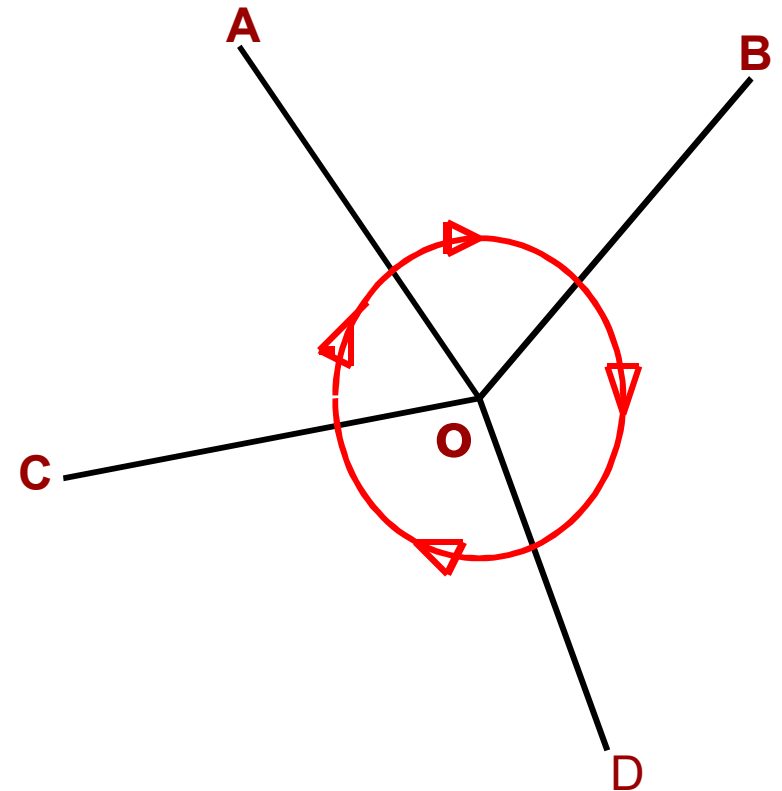

Reiteration Method



MEASUREMENT OF HORIZONTAL ANGLES:


iii) Reiteration Method (contd.).

Procedure. each bisection, find the value of the angle **BOC** and **COD**.

iv) Finally close the horizon by sighting towards the referring object (point A).

v) The vernier **A** should now read **360°**. If not note down the error .This error occurs due to *slip* etc.

vi) If the error is small, it is *equally distributed* among the several angles .If *large* the readings should be *discarded* and a new set of readings be taken.



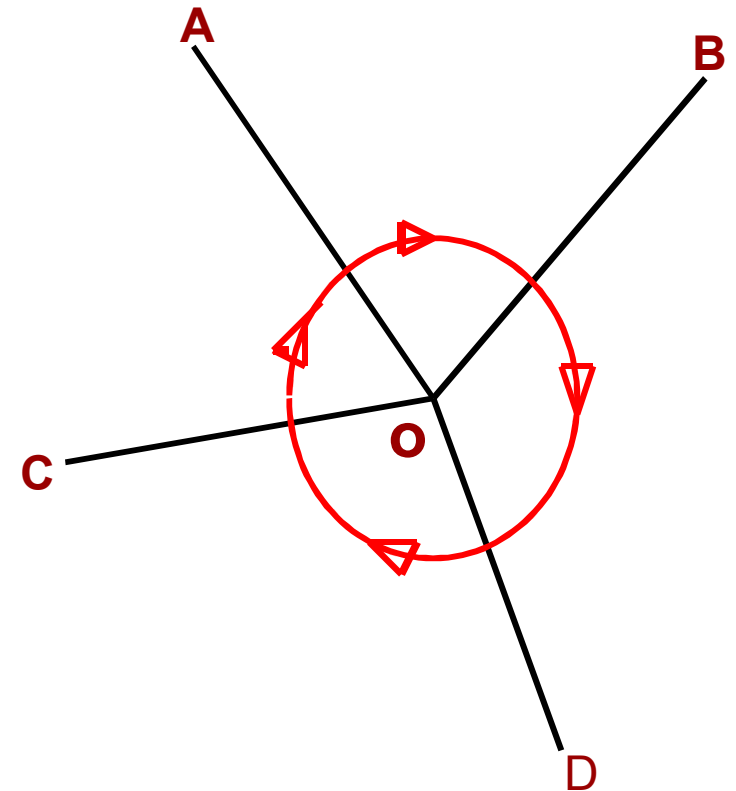


Reiteration Method



MEASUREMENT OF VERTICAL ANGLES:

Vertical Angle : A vertical angle is an angle between the *inclined line of sight* and the *horizontal*. It may be an angle of *elevation* or *depression* according as the object is above or below the horizontal plane.

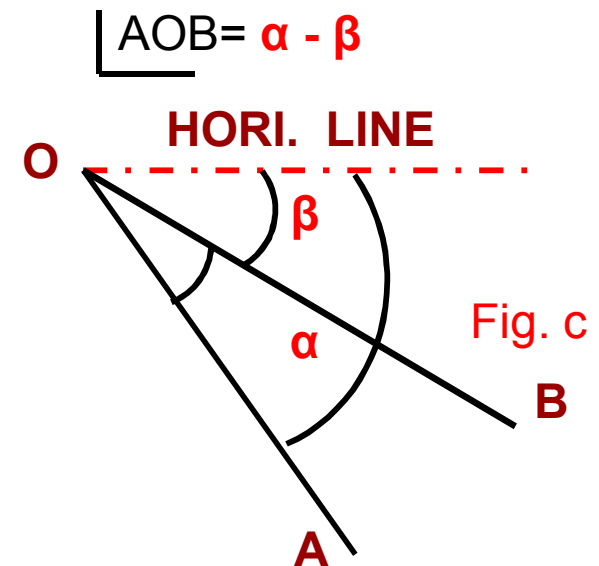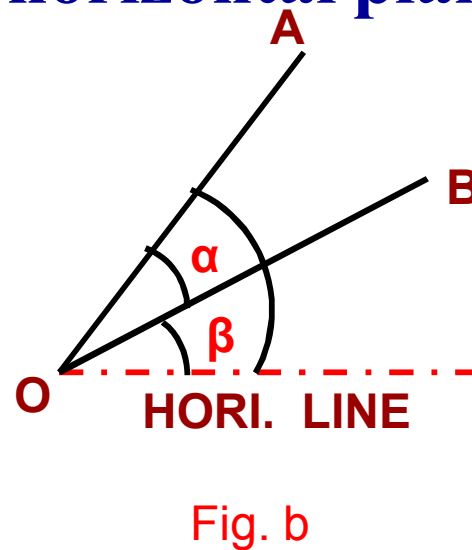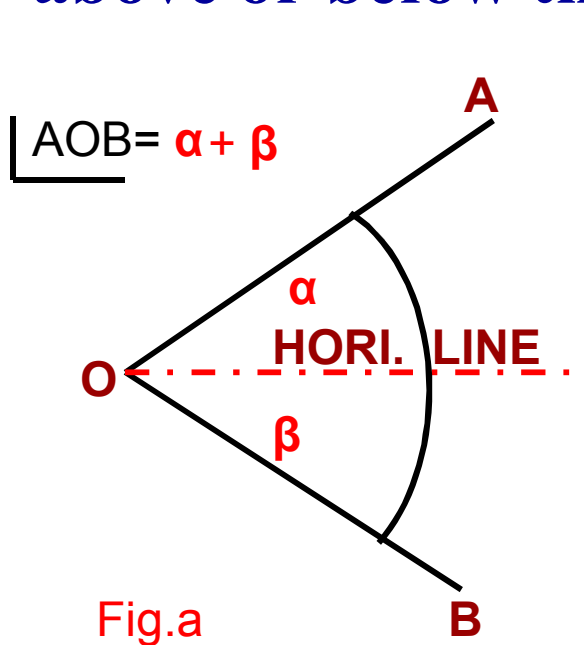


VERTICAL ANGLE



MEASUREMENT OF VERTICAL ANGLES:


To Measure the Vertical Angle of an object A at a station O:

- (i) Set up the theodolite at station point O and level it accurately with reference to the altitude bubble.**
- (ii) Set the zero of vertical vernier exactly to the zero of the vertical circle clamp and tangent screw.**
- (iii) Bring the bubble of the altitude level in the central position by using clip screw. The line of sight is thus made horizontal and vernier still reads zero.**
- (iv) Loosen the vertical circle clamp screw and direct the telescope towards the object A and sight it exactly by using the vertical circle tangent screw.**



MEASUREMENT OF VERTICAL ANGLES:


- (v) Read both verniers on the vertical circle, The mean of the two vernier readings gives the value of the required angle.**
- (vi) Change the face of the instrument and repeat the process. The mean of of the two vernier readings gives the second value of the required angle.**
- (vii) The average of the two values of the angles thus obtained, is the required value of the angle free from instrumental errors.**



MEASUREMENT OF VERTICAL ANGLES:

For measuring Vertical Angle between two points A & B

- i) Sight **A** as before , and take the mean of the two vernier readings at the vertical circle. Let it be α
- ii) Similarly, sight **B** and take the mean of the two vernier readings at the vertical circle. Let it be β
- iii) The sum or difference of these readings will give the value of the vertical angle between **A** and **B** according as one of the points is above and the other below the horizontal plane. or both points are on the same side of the horizontal plane Fig **b** & **c**



READING MAGNETIC BEARING OF A LINE

To find the bearing of a line **AB** as shown in fig .below

- i) Set up the instrument over **A** and level it accurately
- ii) Set the vernier to the zero of the horizontal circle.
- iii) Release the magnetic needle and loosen the lower clamp.
- iv) Rotate the instrument till magnetic needle points to North. Now clamp the lower clamp with the help of lower tangent screw .Bring the needle exactly against the mark in order to bring it in magnetic meridian. At this stage the line of sight will also be in magnetic meridian.

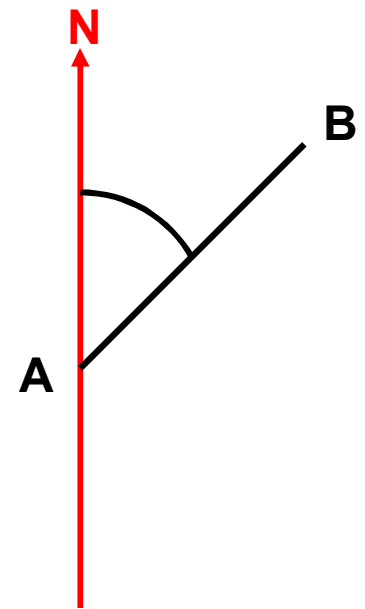


Fig.

Magnetic Bearing of a Line



READING MAGNETIC BEARING OF A LINE

iv) Now loose the upper clamp and point the telescope towards **B** .With the help of upper tangent screw ,bisect **B** accurately and read both the verniers .The mean of the two readings will be recorded as magnetic bearing of line.

v) Change the face of the instrument for accurate magnetic bearing of the line and repeat .the mean of the two values will give the correct bearing of the line **AB**.

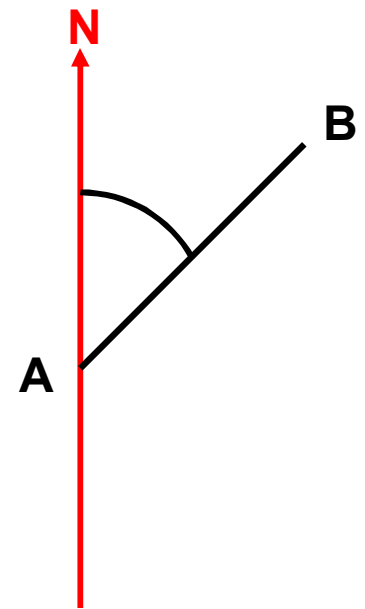


Fig.

Magnetic Bearing of a Line



PROLONGING A STRAIGHT A LINE

There are two methods of prolonging a given line such as **AB**

(1) Fore sight method ,and (2) Back Sight Method

(1)Fore Sight Method. As shown in the fig. below




- i) Set up the theodolite at **A** and level it accurately .Bisect the point **b** correctly. Establish a point **C** in the line beyond **B** approximately by looking over the top of the telescope and accurately by sighting through the telescope.**
- ii) Shift the instrument to **B** ,take a fore sight on **C** and establish a point **D** in line beyond **C**.**
- iii) Repeat the process until the last point **Z** is reached.**

Fig.




PROLONGING A STRAIGHT A LINE

(2) **Back Sight Method.** As shown in the fig. below

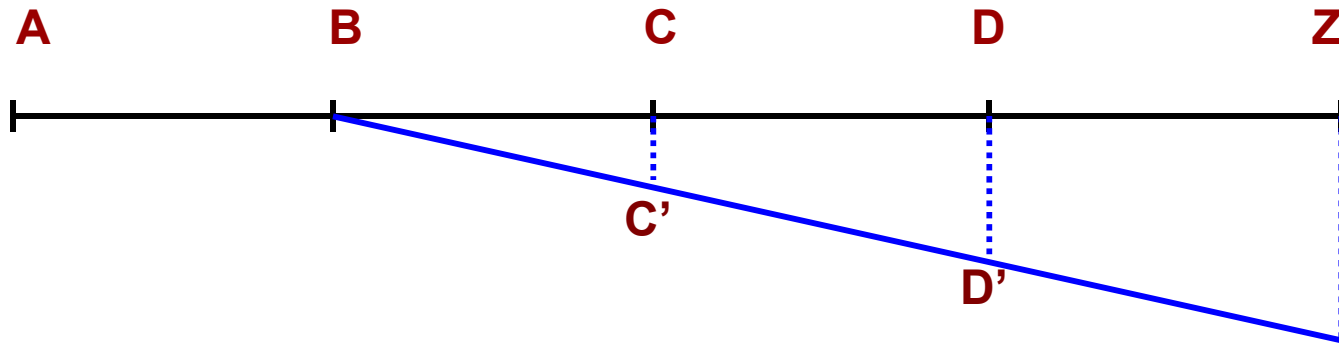


- i) Set up the instrument at **B** and level it accurately .
- ii) Take a back sight on **A**.
- iii) Tighten the upper and lower clamps, transit the telescope and establish a point **C** in the line beyond **B**.
- iv) Shift the theodolite to **C** ,back sight on **B** transit the telescope and establish a point **D** in line beyond **C**. Repeat the process until the last point (**Z**) is established.




PROLONGING A STRAIGHT A LINE

(2) Back Sight Method.(contd.) As shown in the fig. below

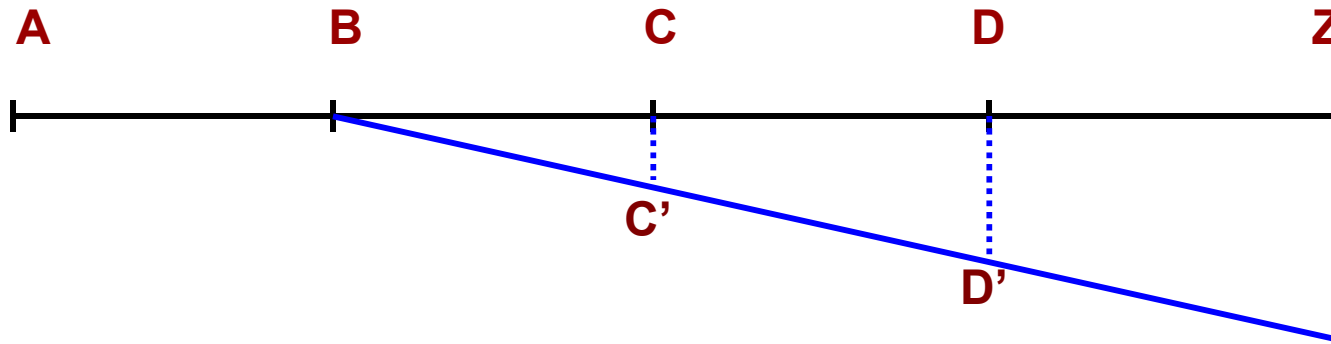

Now if the instrument is in adjustment, the points **A,B,C,D** and **Z** will be in one line, which is straight but if it is not in adjustment i.e. line of collimation is not perpendicular to the horizontal axis ,then **C', D'** and **Z'** will not be in a straight line.




PROLONGING A STRAIGHT A LINE

Double reversing Method


When the line is to be prolonged with *high precision* or when the *instrument* is in *imperfect adjustment*, the process of *double sighting* or *double reversing*, is used.

Suppose the line **AB** is to be prolonged to a point **Z**.

Procedure: As shown below:

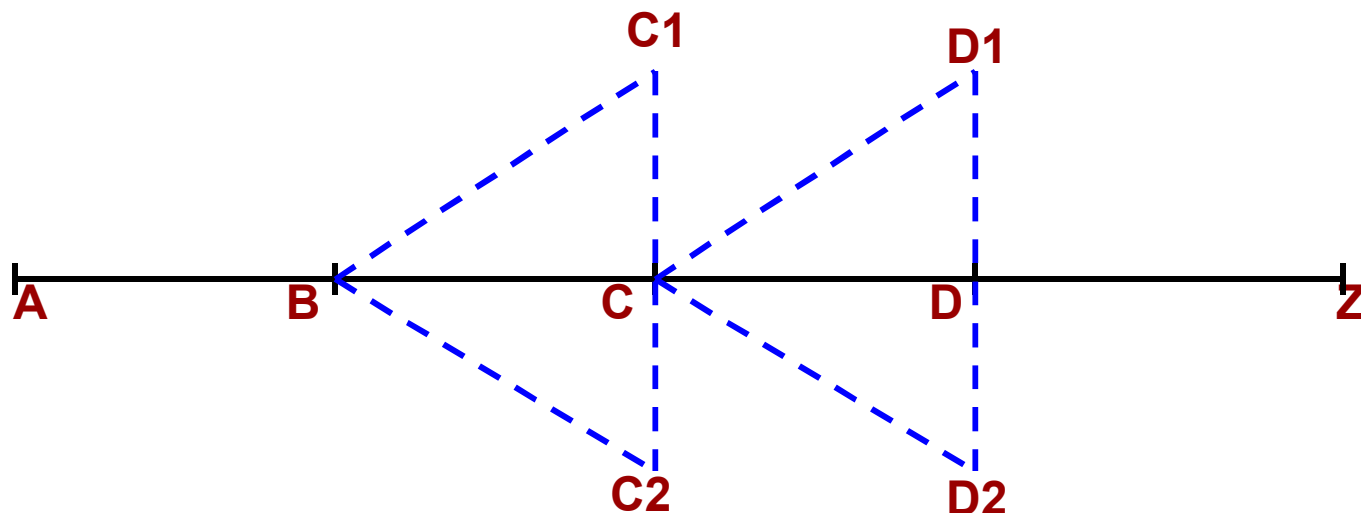


Double Sighting / Reversing Method




PROLONGING A STRAIGHT A LINE

Double reversing Method

- i) Set up the theodolite at **B** and level it accurately.
- ii) With the face of instrument left, back sight on **A** and clamp both the upper and lower motions.
- iii) Transit the telescope and set a point **C₁** ahead in line.

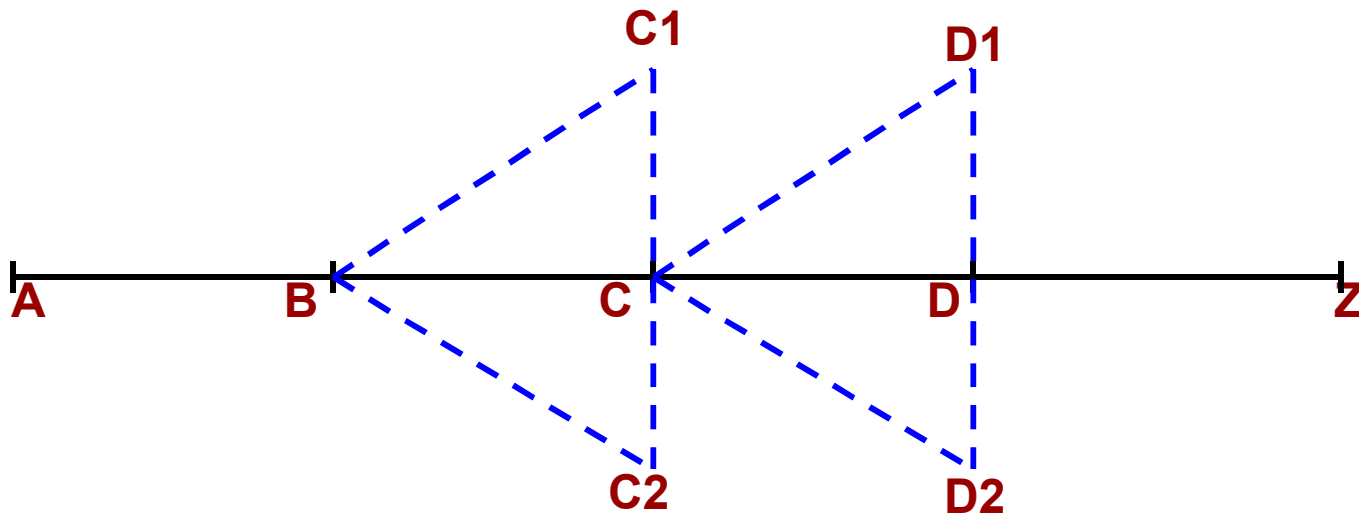


Double Sighting / Reversing Method




PROLONGING A STRAIGHT A LINE

Double reversing Method (contd.)

- iv) Loosen the lower clamp ,revolve the telescope in the horizontal plane and back sight on **A** .Bisect **A** exactly by using the lower clamp and its tangent screw. Now the face of instrument is right.
- v) Transit the telescope and establish a point **C₂** in line beside the point **C₁**.

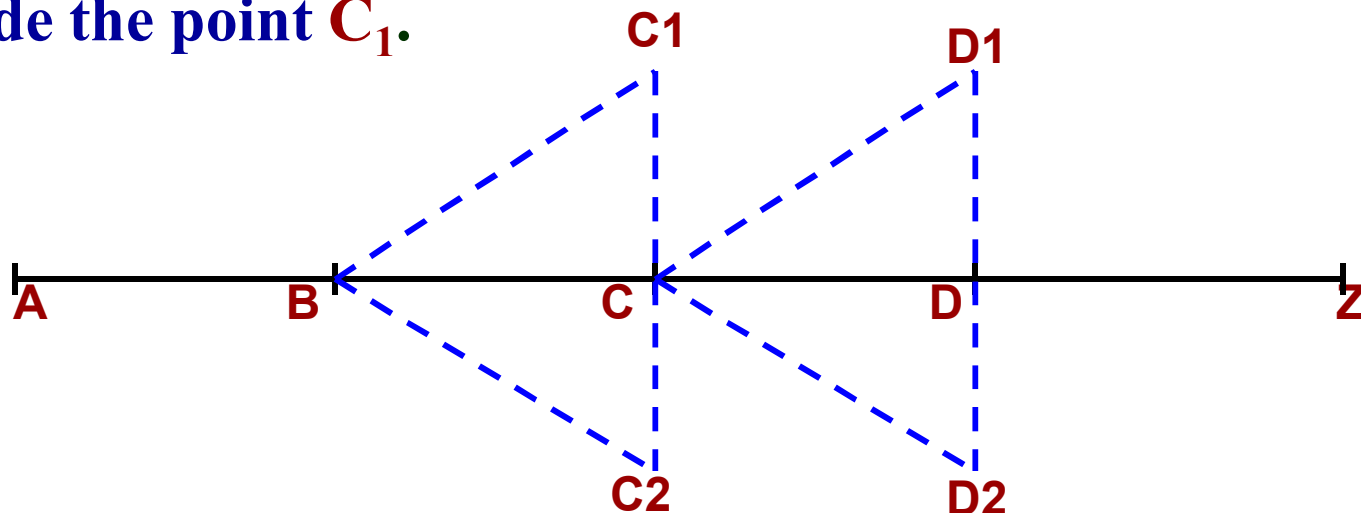

Double Sighting / Reversing Method



PROLONGING A STRAIGHT A LINE

Double reversing Method (contd.)

- vi) The exact position of the true point **C** must be mid-way between **C₁** and **C₂**.
- vii) Measure **C₁** **C₂** and establish a point **C** exactly mid-way, which lies on the true prolongation of **AB**.


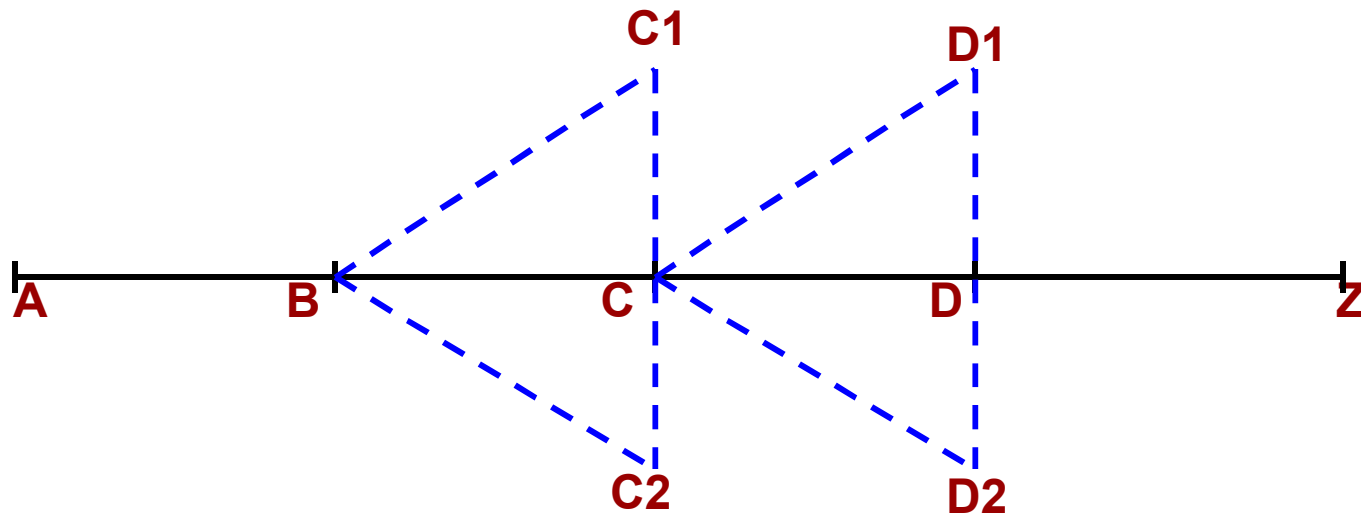



Fig. Double Sighting / Reversing Method



PROLONGING A STRAIGHT A LINE

Double reversing Method (contd.)

- viii) Shift the instrument to **C**, double sight on **B**, establish the point **D₁** and **D₂** and locate the true point **D** as before .
- ix) Continue the process until the last point **Z** is established.

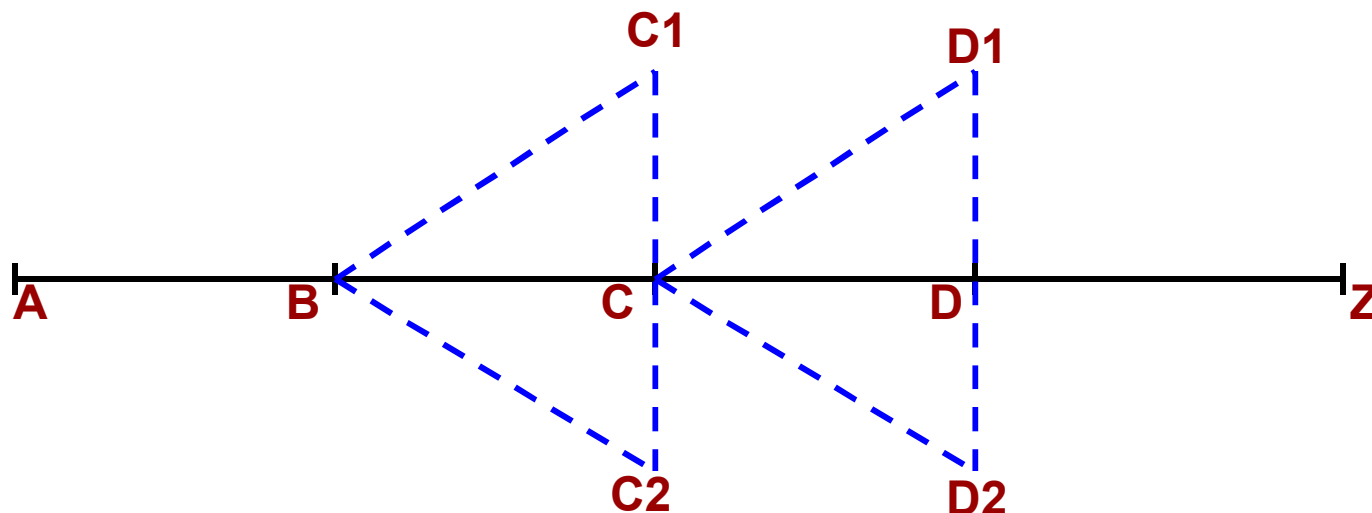

Double Sighting / Reversing Method

